


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

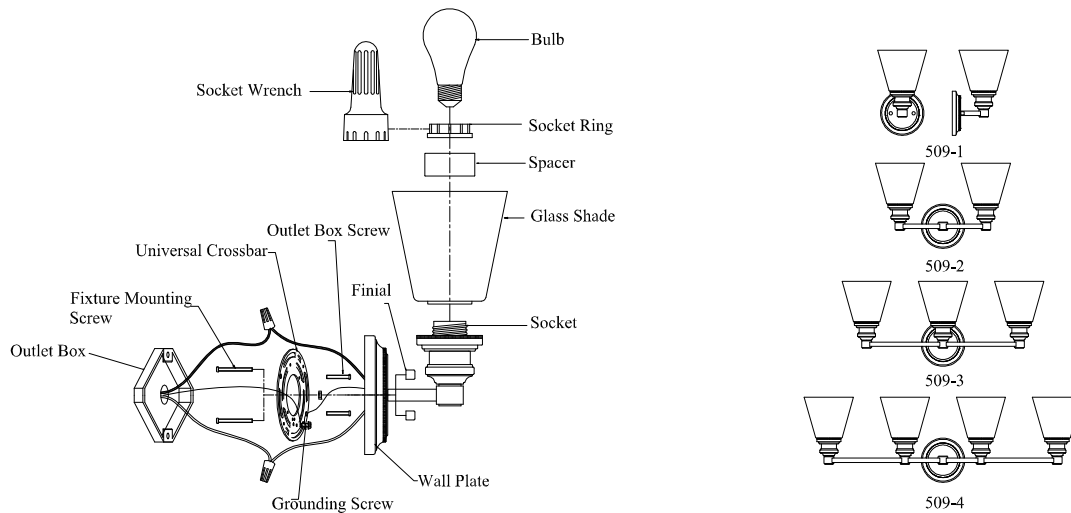

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts for installation
2. Hold Universal Cross Bar up against the wall aligning the two holes in the Outlet Box with appropriate slots in the Universal Cross Bar. Then while the Universal Cross Bar is leveled horizontally, use a pen or pencil to make two marks on the wall at holes located near each end of Universal Cross Bar. Set aside the Back Plate and insert Plastic Anchors into the two marks made on the wall.
3. Thread the supply wires and ground wire from Outlet Box through center holes in Back Plate.
4. Attached the Universal Cross Bar to Outlet box by using the two Outlet box Screws, secure the Back Plate with two Anchor Screws to corresponding holes in the wall.
5. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.Observing: positive wire with positive wire, negative wire with negative wire, ground wire
***Make sure all wire connectors are secured and do not easily pull off with the slight tug.
6. Once all wires are connected, tuck them carefully into Outlet Box.
7. Place the Front Plate over Back Plate and secure Back Plate to Front Plate with Mounting Screws.
8. Slide Glass Shade, Spacer and Socket Ring onto Socket and use Socket Wrench to secure Glass Shade by threading Socket Ring onto Socket tightly.
9. Install Bulb to Socket. DO NOT EXCEED THE SPECIFIED WATTAGE!
10. Return the power to the Outlet Box and test fixture. Your installation is now complete.

509-1-xx, 509-2-xx, 509-3-xx, 509-4-xx