

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

## WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

## FOR PENDANT

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
4. Make wire connections with wire nuts:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach ribbed wire from light to white wire from power source with a wire nut.
  - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.

5. Raise the canopy to ceiling, securing it by screwing the collar loop.
6. Let F on A by screwing.
7. Let B through F, C and D through F respectively too, then use the nut washer to make B.C.D fixation tight.
8. Let E through F, lock G on F and make E fixation tight.

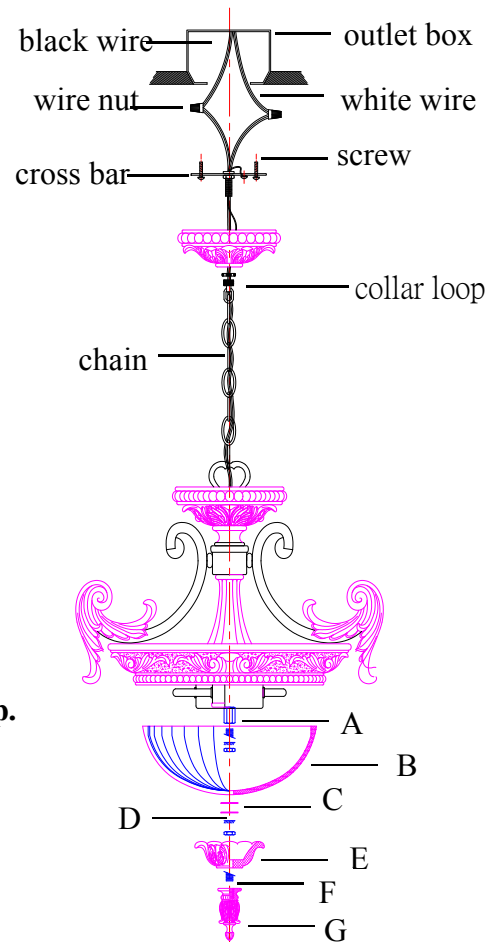

## FOR SEMI FLUSH MOUNT

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
4. Make wire connections with wire nuts:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach ribbed wire from light to white wire from power source with a wire nut.
  - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.

5. Let the screw through canopy and fix canopy tight by nut.
6. Repeat the steps 6~8 as for pendant.

