

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.


FOR PENDANT

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
5. Raise the canopy to ceiling, secure it by screwing the collar loop.
6. Fix loop on A.
7. Use G through B . C . D . E and fix them tight by F.

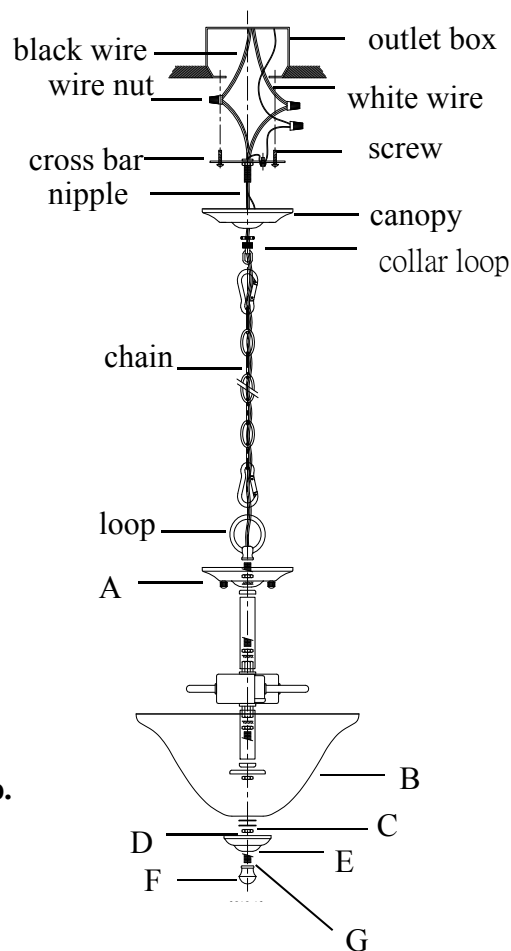

FOR SEMI FLUSH MOUNT

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
5. Use the screw through canopy and fix canopy tight by nut.
6. Repeat the step 7 as for pendant.

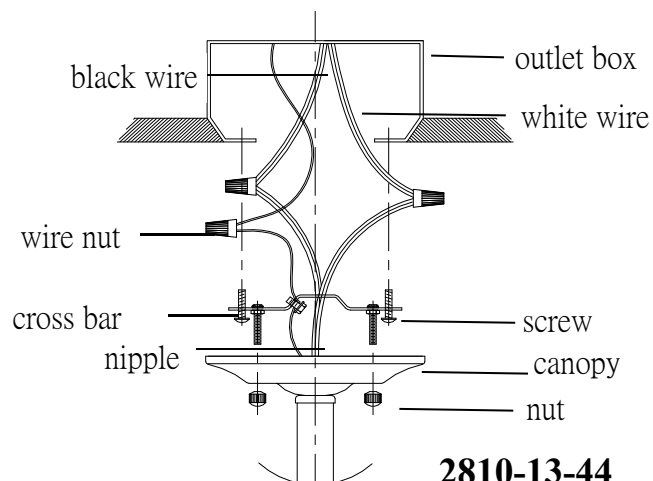

2810-13-44

2810-13-58

2810-13-60

2810-13-64

2810-13-86

2810-13-95

2810-13170

2810-13186