

ASSEMBLY AND INSTALLATION INSTRUCTIONS


TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

For semi flush mount -See FIG. A

1. Carefully unpack and lay all parts on a clean, level surface.
2. Supply wire and ground wire are passed through canopy (G), flat washer (H), tooth washer (I) and nut (J). The canopy (G) is tightened onto the nipple (A) with the nut (J).
3. Secure the glass shade (C) to the mounting bracket (B) with the 3pcs decorative screw (D), rubber washer (E) and decorative nut (F).
4. Attach the mounting plate (L) to outlet box using 2 outlet box screws (K) upwards.
5. Make wire connections :
Determine the length of the supply wire and ground wire you need, using pliers to disconnect the extra supply wire and ground wire and discard it away.
--Attach ground wire to house ground wire using a wire nut.
(Or attach them to the mounting plate with a green ground screw).
--Attach white wire from light to white wire from power source with a wire nut.
--Attach black wire from light to black wire from power source with a wire nut.
6. Tuck the wire connections neatly into the outlet box.
7. Attach the canopy (G) to mounting plate (L) by using a mounting screws (M).
8. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
9. Turn power on at fuse or circuit box.

FIG. A

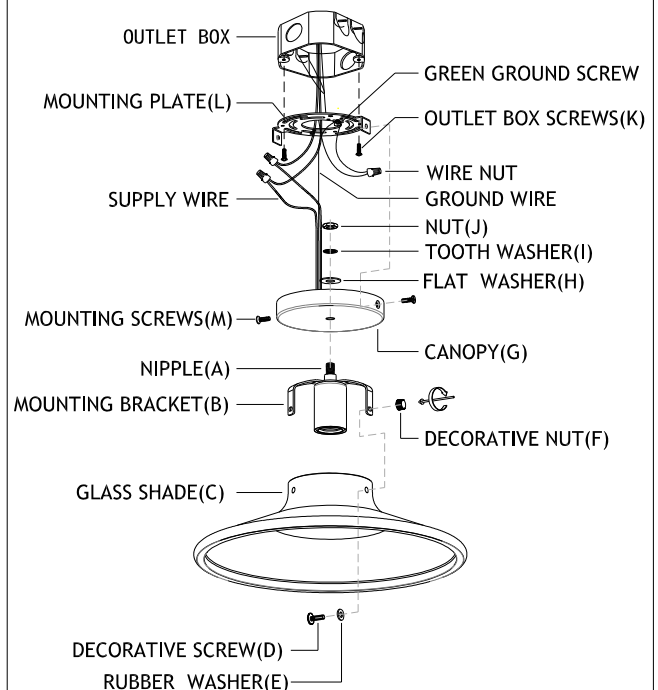

For Pendant -See FIG. B.

1. Carefully unpack and lay all parts on a clean, level surface.
2. Secure the glass shade (C) to the mounting bracket (B) with the 3pcs decorative screw (D), rubber washer (E) and decorative nut (F).
3. Thread the fixture loop (G) to the nipple (A) on top of fixture body.
4. Assemble the nipple (J) onto the crossbar, and lock it in place by hex nut (I). Attach the cross bar to outlet box using 2 outlet box screws upwards.
5. Determine the length of the chain you need, using pliers to disconnect the extra chain and discard it away. weave fixture wires and ground wire through the every other chain links, top loop and the nipple (J), secure the top loop to the nipple (J) and hang the chain to the top loop and the fixture loop (G) with 2 quick links (H).
6. Make wire connections:
--Attach ground wire to house ground wire using a wire nut. (Or attach them to the cross bar with a green ground screw).
--Attach white wire from light to white wire from power source with a wire nut.
--Attach black wire from light to black wire from power source with a wire nut.
7. Tuck the wire connections neatly into the outlet box.
8. Attach the canopy to the ceiling, then secure with top nut.
9. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
10. Turn power on at fuse or circuit box.

FIG. B

