

ASSEMBLY AND INSTALLATION INSTRUCTIONS

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

For semi flush mount -See FIG. A

1. Secure the ARMS (D) to the CANOPY assembly (A) with the FINIALS(C).
2. Thread the NIPPLE WITH HEX NUT (G) to the COUPLING (F) and secure it with hex nut.
3. Put the STEEL WASHER (H) and RUBBER WASHER (I) over the NIPPLE (G).
4. Slide the GLASS SHADE (J), RUBBER WASHER (I), and STEEL WASHER (H) over the NIPPLE (G), and secure them with HEX NUT (K).
5. Slide the CUP (L) over the NIPPLE (G) and secure it with FINIAL (M).
6. Attach the mounting plate to outlet box using 2 outlet box screws upwards.
7. Make wire connections :
 - Attach ground wire to house ground wire using a wire nut. (Or attach them to the mounting plate with a green ground screw).
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.
8. Tuck the wire connections neatly into the outlet box.
9. Attach the CANOPY (A) to the ceiling and let the 2 mounting screws protrude through the 2 holes in the CANOPY (A) and fix it in place by using 2 DECORATIVE NUTS (B).
10. Turn power on at fuse or circuit box.

For Pendant -See FIG. A & FIG. B.

1. Assemble the NIPPLE (N) onto the crossbar, and lock it in place by HEX NUT (O). Attach the cross bar to outlet box using 2 outlet box screws upwards.
2. Thread the FIXTURE LOOP (P) to the top of the FIXTURE BODY (Q).
3. Determine the length of the chain you need, using pliers to disconnect the extra chain and discard it away. Weave fixture wires and ground wire through the every other chain links, top loop and the NIPPLE (N), secure the top loop to the NIPPLE (N) and hang the chain to the top loop and the FIXTURE LOOP (P) with 2 QUICK LINKS (R).

Make wire connections:

- Attach ground wire to house ground wire using a wire nut. (Or attach them to the cross bar with a green ground screw).
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.
4. Tuck the wire connections neatly into the outlet box.
 5. Attach the canopy to the ceiling, then secure with top nut.
 6. Thread the NIPPLE WITH HEX NUT (G) to the COUPLING (F) and secure it with hex nut.
 7. Put the STEEL WASHER (H) and RUBBER WASHER (I) over the NIPPLE (G).
 8. Slide the GLASS SHADE (J), RUBBER WASHER (I), and STEEL WASHER (H) over the NIPPLE (G), and secure them with HEX NUT (K).
 9. Slide the CUP (L) over the NIPPLE (G) and secure it with finial (M).
 10. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
 11. Turn power on at fuse or circuit box.

FIG. A


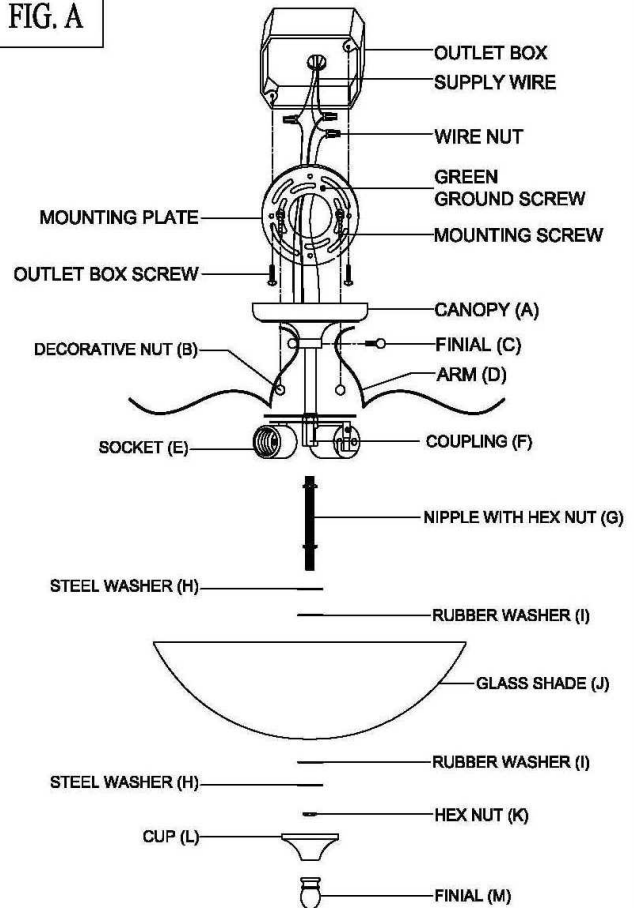


FIG. B

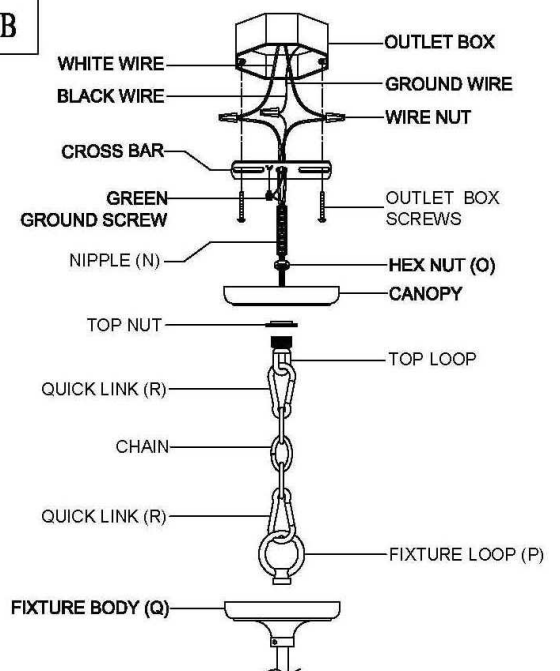

#2827-15-65
#2827-15-86