

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

* FOR PENDANT:

1. Thread the fixture loop onto the nipple(B).
2. Assemble the nipple(A) onto the cross bar, and lock it in place by hex nut.
3. Attach the cross bar to outlet box using 2 outlet box screws upwards.
4. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
5. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple(A); secure the top loop to the nipple(A) and hang the chain to the top loop and fixture loop.
6. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.**Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
7. Tuck the wire connections neatly into the outlet box.
8. Attach the canopy to the ceiling, and secure it with top nut.
9. Thread the tube onto the nipple(D), thread the nipple(C) onto the tube.
10. Attach the fixture arm onto the fixture frame, then secure it by ball nut.
11. Attach the glass panels onto the fixture frame and bend the metal clips to secure the glass panels.
12. Place the candle sleeve onto the socket.
13. Install bulb. (not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
14. Turn on the power at fuse or circuit box.

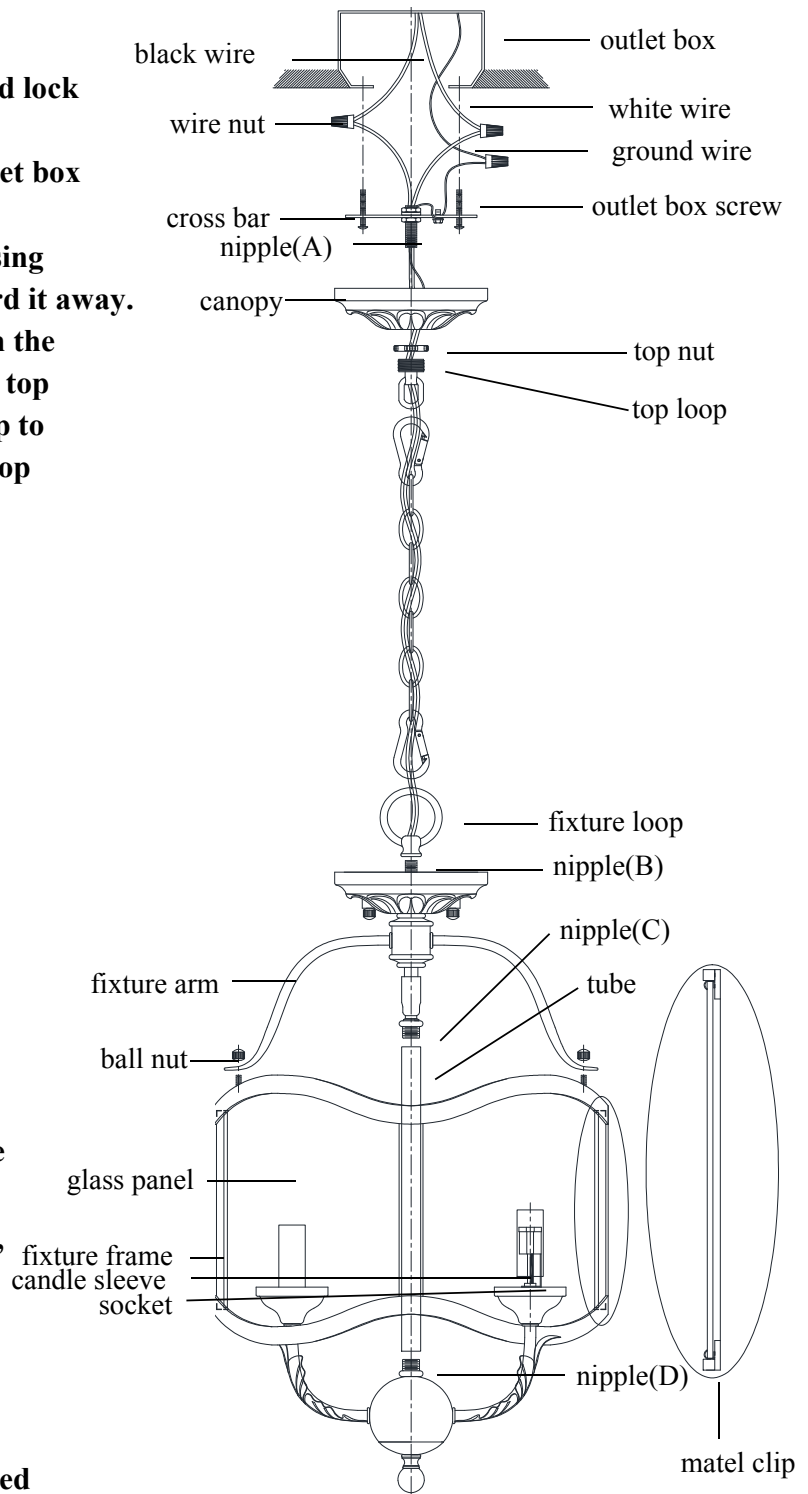

2906-13-39

2906-13-70

2906-13-94

2906-16-39

2906-16-70

2906-16-94

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

* FOR SEMI-FLUSH MOUNT:

1. Thread 2 mounting screws properly into the relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.**Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
4. Tuck the wire connections neatly into the outlet box.
5. Attach the fixture body to the ceiling and let the 2 mounting screws pass through the 2 pre-drilled holes on the canopy and fix it in place by ball nuts.
6. Thread the tube onto the nipple(D), thread the nipple(C) onto the tube.
7. Attach the fixture arm onto the fixture frame, them secure it by ball nut.
8. Attach the glass panels onto the fixture frame and bend the metal clips to secure the glass panels.
9. Place the candle sleeve onto the socket.
10. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
11. Turn on the power at fuse or circuit box.

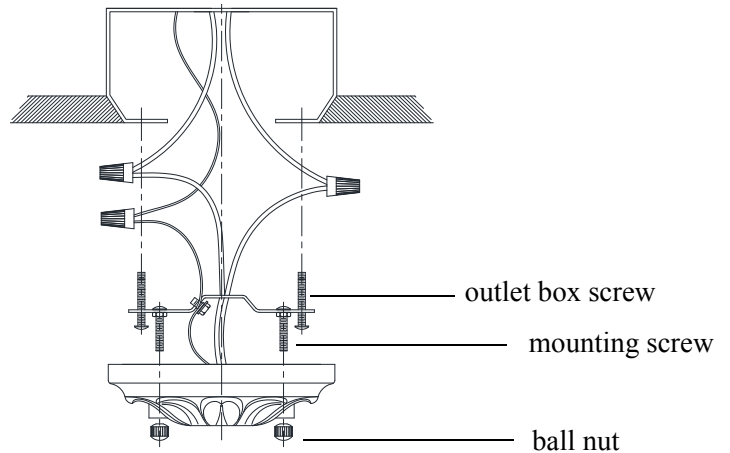

2906-13-39

2906-13-70

2906-13-94

2906-16-39

2906-16-70

2906-16-94