
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK , BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

NOTE : Before installing ,consult local electrical codes for wiring and grounding requirement


1. Thread the nipple (B) into the coupling (A) and secure it with hex nut.
2. Slide the space tube (C), check ring (D), check ring (E) onto the nipple (B) and secure them with hex nut (H).
3. Slide the glass shade (J), steel washer (I) onto the nipple (B) and secure them with hex nut (H).
4. Slide the cap (G) onto the nipple (B) and thread it with finial (F).
5. Thread 2 mounting screws properly into the relevant mounting holes pre-drilled on the cross bar.
6. Attach the cross bar to outlet box using 2 outlet box screws upwards.
7. Make wire connections :
   - - - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
   - - - Attach ribbed wire from light to white wire from power source with a wire nut.
   - - - Attach smooth wire from light to black wire from power source with a wire nut.
8. Tuck the wire connections neatly into the outlet box.
9. Attach the fixture body to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled keyholes on the canopy and fix it in place by ball nuts (K).
10. Turn power on at fuse or circuit box.

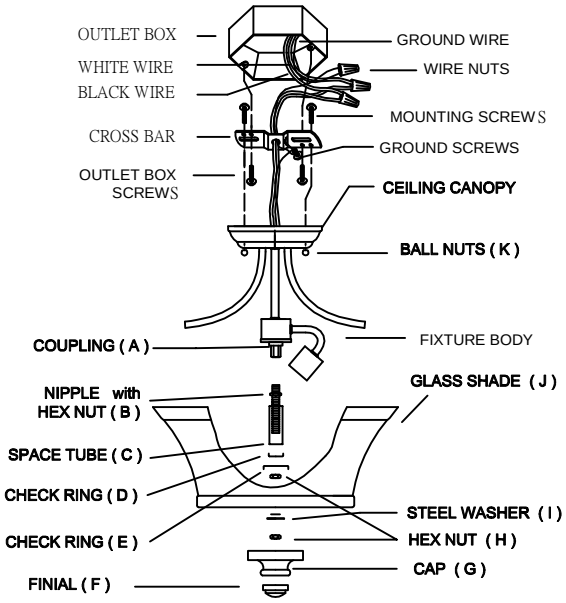

YOU CAN ALSO INSTALL THIS FIXTURE AS A PENDANT ACCORDING TO THE FOLLOWING STEPS (SEE FIG.A) :

1 Thread the fixture loop (A) onto the nipple (B) tightly.
2. Thread hex nut (D) onto nipple (C) properly, then slide the washer on the nipple (C) and let it set over the hex nut.
3. Assemble the cross bar to outlet box using 2 outlet box screws upwards.
4. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
5. Weave fixture wires and ground wire through the every other chain links, top nut, canopy, top loop and nipple (C); secure the top loop to the nipple (C) and hang the chain to the top loop and the fixture loop.
6. Make wire connections :
   - - - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
   - - - Attach ribbed wire from light to white wire from power source with a wire nut.
   - - - Attach smooth wire from light to black wire from power source with a wire nut.
7. Tuck the wire connections neatly into the outlet box.
8. Attach the canopy to the ceiling, then secure with top nut.
9. Turn power on at fuse or circuit box.

FIG.A

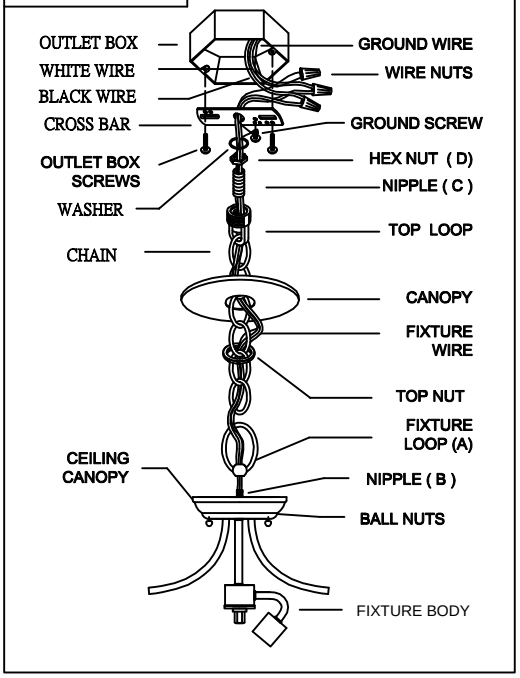

2922-13-XX