

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Make wire connections:

- Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
- Attach white wire from light to white wire from power source with a wire nut.
- Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire,
ground wire with ground wire.

2. Remove the 2 mounting screws from the cross bar. Let the 2 mounting screws pass through the holes specially provided on the cross bar and lock them by hex nuts.
3. Let the two mounting screws protrude through the two pre-drilled holes on the fixture frame and fix them in place by the two ball nuts.
4. Tuck the wire connections neatly into the outlet box.
5. Attach the cross bar and fixture frame to outlet box using 2 outlet box screws upwards.
6. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
7. Twist the glass shade onto the fixture frame.
8. Turn on the power at fuse or circuit box.

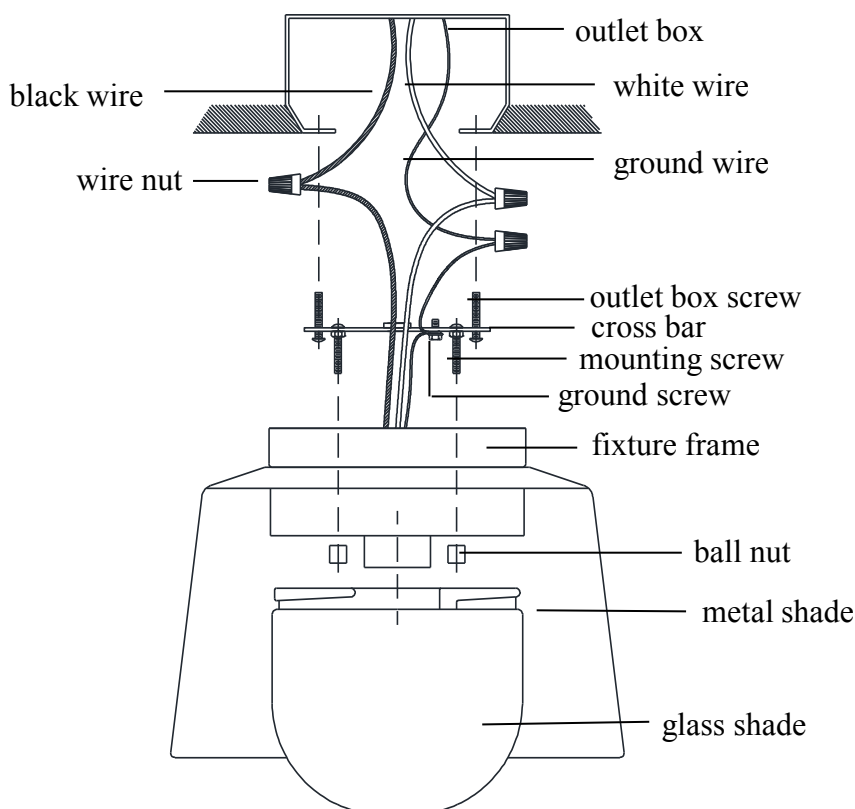

3003-11-65
3003-11-69
3003-11-8
3003-11-80