ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF


POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

- 1. Attach the cross bar to outlet box using 2 outlet box screws upwards.
- 2. Make wire connections:
 - --Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - --Attach white wire from light to white wire from power source with a wire nut.
 - --Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

- 3. Tuck the wire connections neatly into the outlet box.
- 4. Attach the fixture frame to the ceiling. Let the two mounting screws pass through the two side holes provided on the cross bar and fix them in place with ball nuts.
- 5. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
- 6. Twist the glass shade onto the socket.
- 7. Turn on the power at fuse or circuit box.

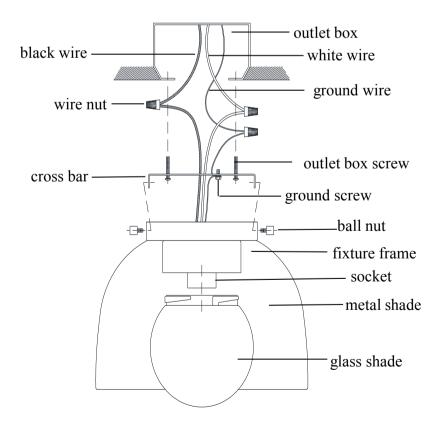

3004-11-65

3004-11-69

3004-11-8

3004-11-80