

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread two mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Make wire connections:

- Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
- Attach white wire from light to white wire from power source with a wire nut.
- Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire,
negative wire with negative wire, ground wire
with ground wire.

4. Tuck the wire connections neatly into the outlet box.
5. Attach the canopy to the ceiling, then secure it with the two ball nuts.
6. Put candle sleeve onto the socket.
7. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
8. Turn on the power at fuse or circuit box.

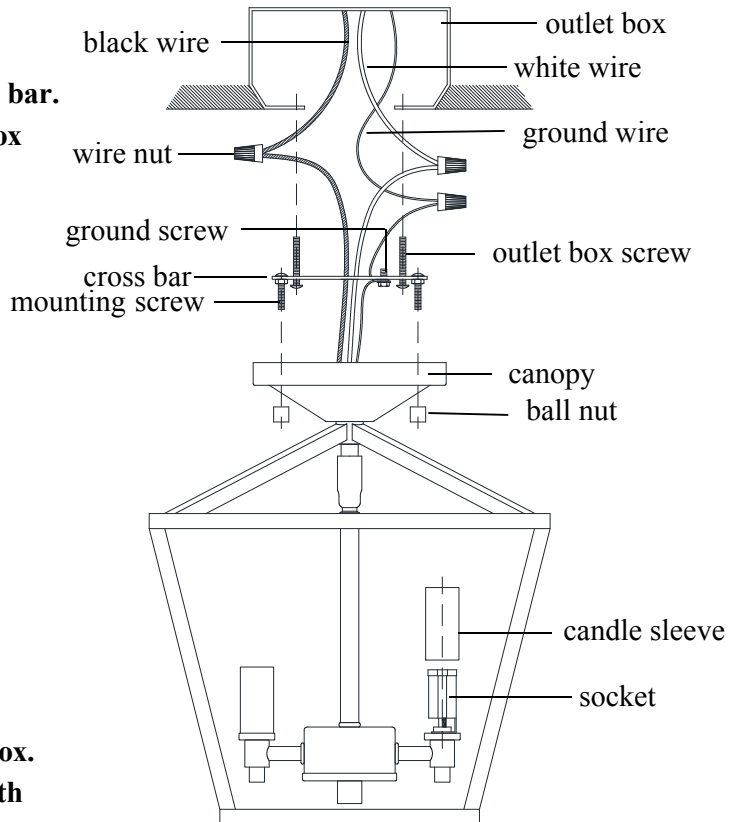

304-10-69	304-13-69
304-10-64	304-13-64
304-10-74	304-13-74
304-10-86	304-13-86