

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

**1. Attach the universal cross bar to outlet box using
2 outlet box screws upwards.**

2. Make wire connections:

- Attach ground wire to house ground wire using a wire nut or attach them to the universal cross bar with a green ground screw.
- Attach white wire from light to white wire from power source with a wire nut.
- Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire,
negative wire with negative wire, ground wire
with ground wire.


3. Tuck the wire connections neatly into the outlet box.

**4. Attach the fixture frame to the ceiling. Let the two side
screws pass through the two side holes provided on the
canopy and universal cross bar and then fix them tight.**

**5. Install bulb.(not included) (Please do not exceed the
maximum capacity which is recommended on the
fixture.)**

6. Twist the glass shade to the socket.

7. Turn on the power at fuse or circuit box.

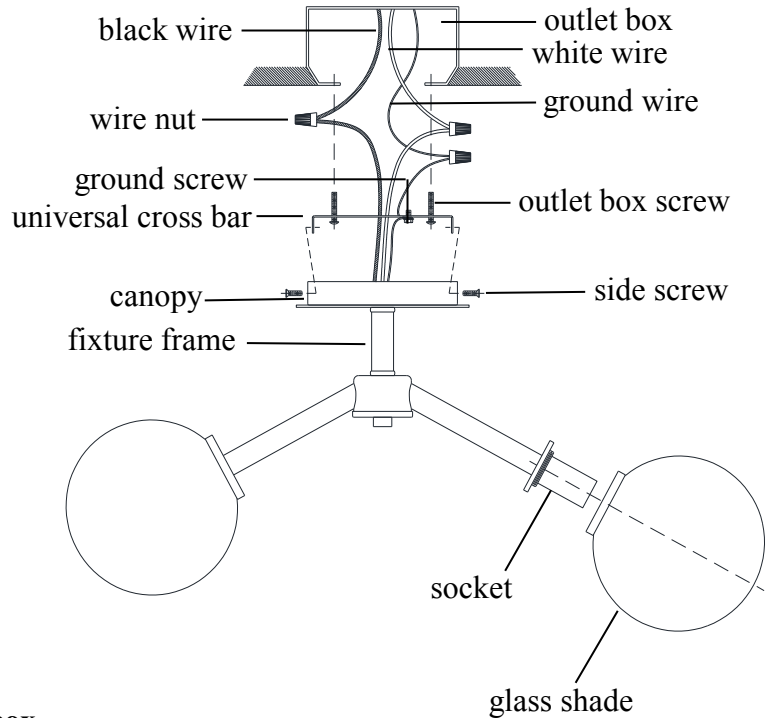

3132-21-80