

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


## WARNING

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Insert downward 2 screws to the mounting strap.
2. Attach the mounting strap to the outlet box by using 2 mounting screws.
3. Make wire connections with wire nuts:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach ribbed wire from light to white wire from power source with a wire nut.
  - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.
4. Fix I on J, H on I, G on H, F on G, A on F, B on A, J on C, B on canopy.
5. Use K lock tight on canopy.
6. Fix D on C with E.

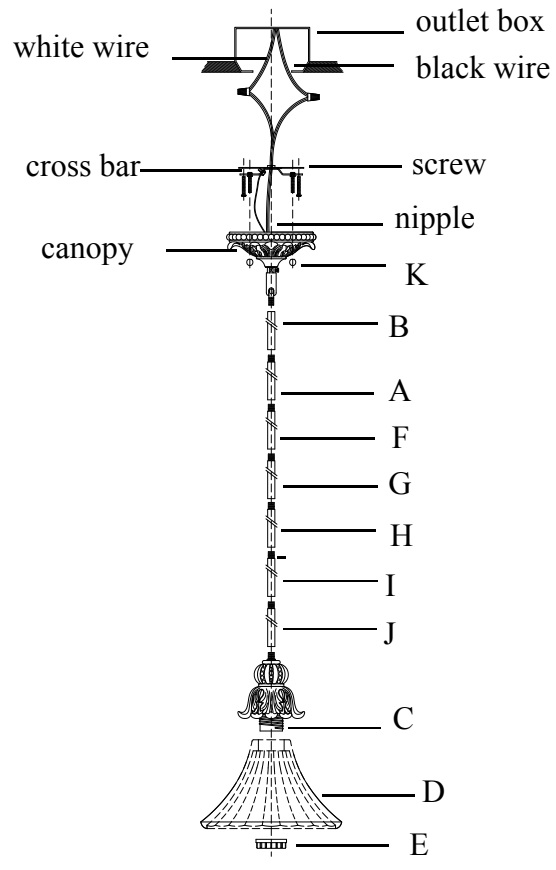

3330-88