


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK ,BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

NOTE : Before installing ,consult local electrical codes for wiring and grounding requirement

1. Thread the tube (D) onto the nipple (E), then thread swivel (F) into the tube tightly.
2. Put the glass shade (B) over the socket (C) and secure it with socket ring (A).
3. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
4. Attach the cross bar to outlet box using 2 outlet box screws upwards.
5. Make wire connections :
 - - - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
 - - - Attach ribbed wire from light to white wire from power source with a wire nut.
 - - - Attach smooth wire from light to black wire from power source with a wire nut.
6. Tuck the wire connections neatly into the outlet box.
7. Attach the canopy (H) to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled keyholes on the canopy(H) and secure with ball nuts (G).
8. Turn power on at fuse or circuit box.

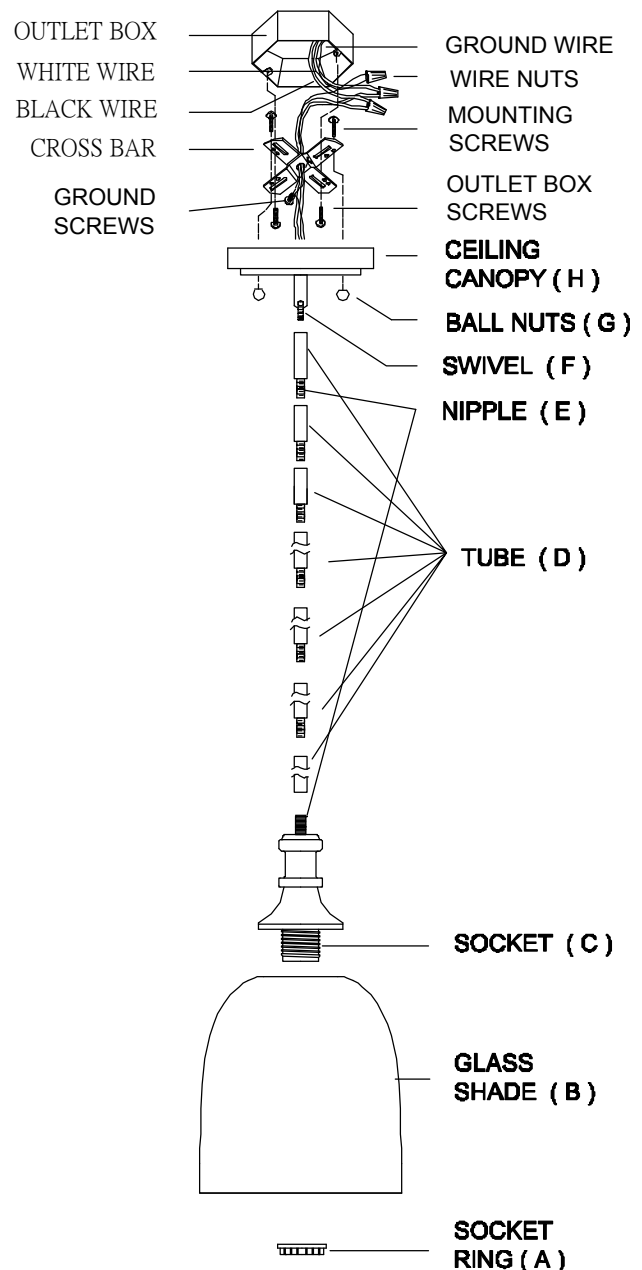

3811-XX # 3911-XX

3811-1XX # 3911-1XX