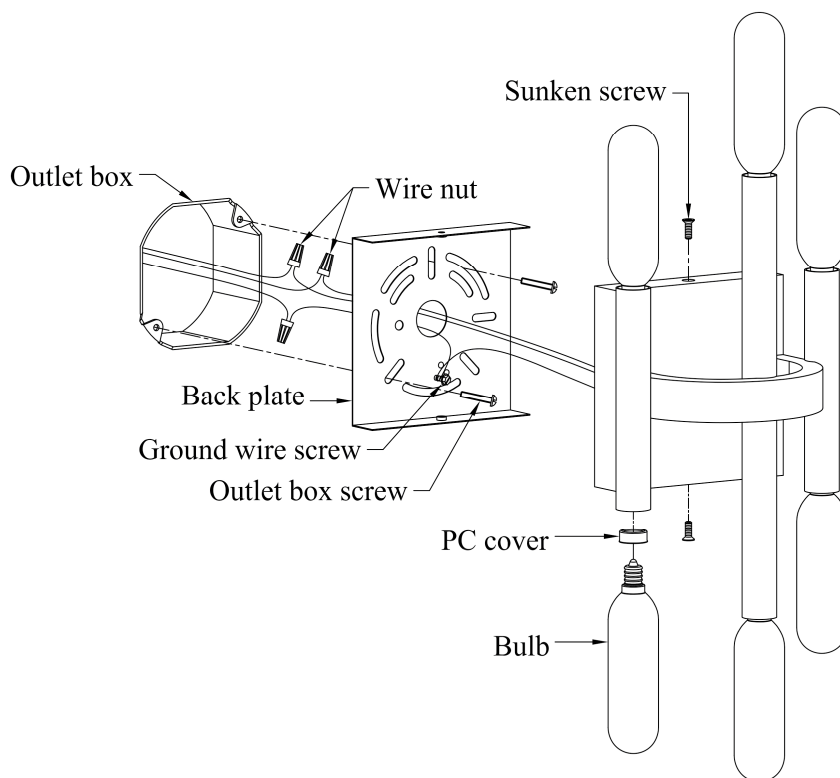# ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:	TO AVOID RISK OF ELECTRICAL SHOCK,BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

Sunken screw

Outlet box

Wire nut

Back plate

Ground wire screw

Outlet box screw

PC cover

Bulb

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.

2. Thread the supply wires and ground wire from Outlet Box through center holes of Backplate.

3. Attach the Backplate to outlet box by using two Outlet box screws.

4. Make wire connections:
   --Attach ground wire to house ground wire using a wire nut or attach them to the Back Plate with a green ground screw.
   --Attach white wire from light to white wire from power source with a wire nut.
   --Attach black wire from light to black wire from power source with a wire nut.
   Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
   *** Make sure all wire connectors are secured and do not easily pull off with the slight tug.

5. Tuck the wire connections neatly into the outlet box.

6. Fasten the fixture to backplate by using 2 sunken screws each at top and bottom of front plate.

7. Attach PC cover onto the LED bulb then install bulb to the socket. (Please do not exceed the maximum capacity which is recommended on the socket.)

8. Turn on the power at fuse or circuit box.

50-6-xxxx