


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

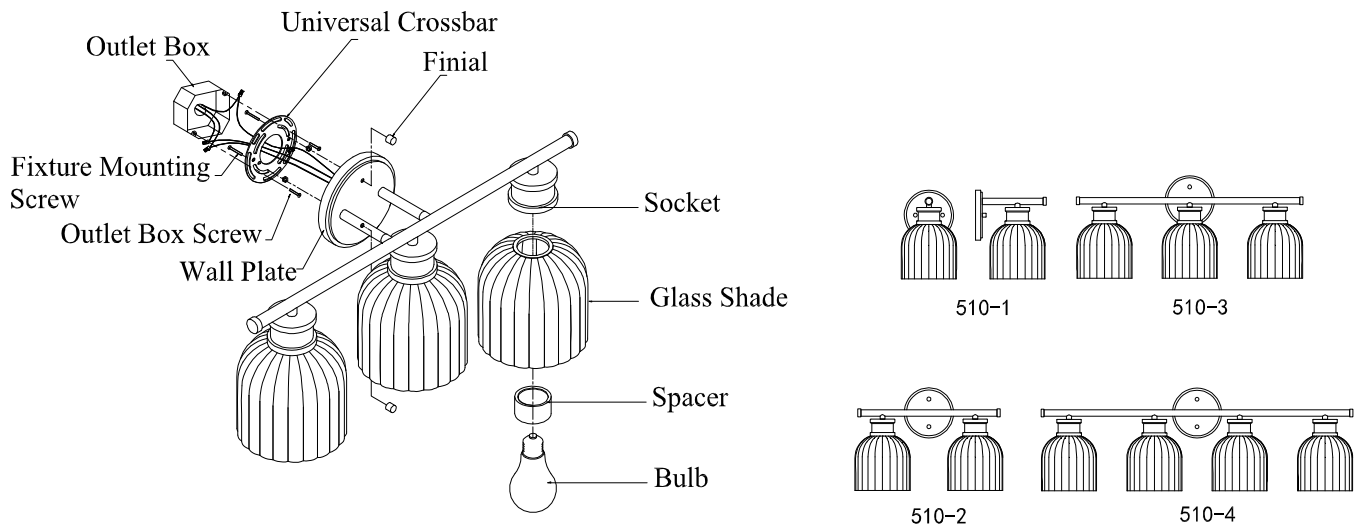

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
2. Attach two fixture mounting screws to universal crossbar and tighten with two hex nuts.
3. Fix the universal crossbar to outlet box by using two outlet box screws.
4. Make wire connections:
 - attach ground wire to house ground wire using a wire nut or attach them to the universal crossbar with a green ground screw.
 - attach white wire from light to white wire from power source with a wire nut.
 - attach black wire from light to black wire from power source with a wire nut.Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.
***Make sure all wire connectors are secured and do not easily pull off with the slight tug.
5. Once all wires are connected, tuck them carefully into outlet box.
6. Place the wall plate over universal crossbar and let the two fixture mounting screws pass through the two pre-drilled holes on the wall plate then fasten it with the two finials.
7. Slide glass shade to socket and use spacer to secure glass shade onto socket tightly.
8. Install bulb/bulbs.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
9. Turn on the power at fuse or circuit box.

510-1-xx 510-2-xx 510-3-xx 510-4-xx