

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

**MOUNTING AND WIRING INSTRUCTIONS FOR WALL MOUNTED
FIXTURES WITH CENTRE, AND BARREL NUT MOUNTING.** RIS-71

-WARNING - PLEASE READ

Contact with live wires may result in **SERIOUS PERSONAL INJURY AND PROPERTY DAMAGE.**

The following rules **MUST BE ADHERED TO** when installing light fixtures.


Do not attempt such installation unless you fully understand the instructions, and can identify the wires to be connected.

MAKE CERTAIN:

- 1) To disconnect power at main fuse box before installation, and during entire installation process.
- 2) The ground wire (bare, or green insulated wire) is not connected to current carrying supply wires.
- 3) No bare wires are exposed outside of connectors when connecting current carrying fixture wires to current carrying house wires.
- 4) The insulation on fixture wires has not been damaged during installation.
- 5) No rough, or sharp edges, of any surface are in contact with wires.
- 6) Fixture supply wires are connected to proper house supply wires.
- 7) To use light bulbs with wattages no greater than specified for the fixture.
- 8) Power is off when placing light bulbs in fixture.

If you have any doubts about how to install a light fixture, or it fails to operate properly, contact a local licensed electrician.

CENTRE MOUNT

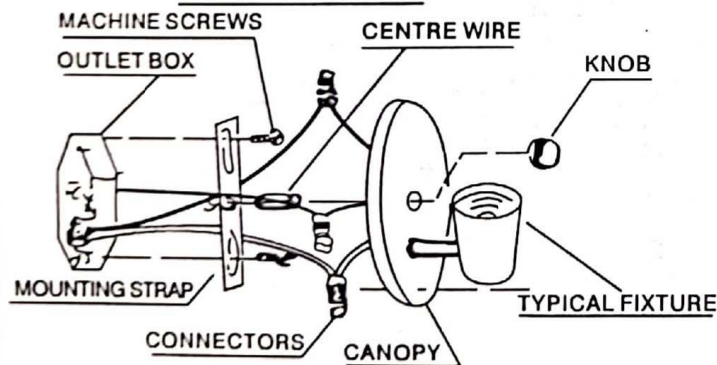

STEP No.1

Fasten mounting strap to outlet box with machine screws (found in outlet box).

STEP No.2

Screw centre wire (found in envelope) into threaded hole in mounting strap, as indicated.


STEP No.3

Connect fixture wires to house wires with connectors as shown.
(BLACK FIXTURE WIRE TO BLACK HOUSE WIRE; WHITE FIXTURE WIRE TO WHITE HOUSE WIRE)

STEP No.4

Position fixture against wall so that centre wire protrudes through hole in canopy, and secure by turning knob onto centre wire.

BARREL NUT MOUNT

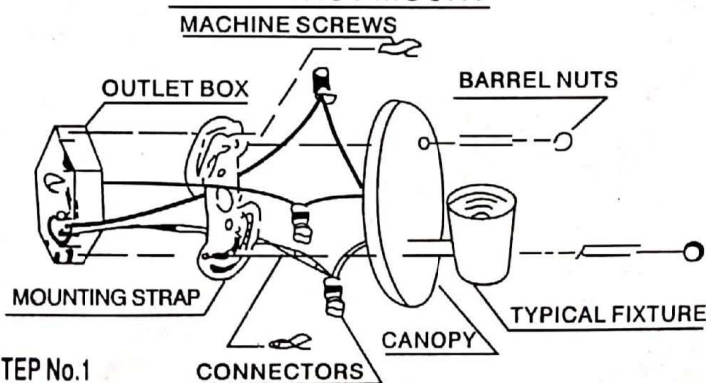

STEP No.1

Turn machine screws (found in envelope) through threaded holes in mounting strap as shown.

STEP No.2

Fasten mounting strap to outlet box with machine screws (found in outlet box).

STEP No.3

Connect fixture wires to house wires with connectors, as shown.
(BLACK FIXTURE WIRE TO BLACK HOUSE WIRE; WHITE FIXTURE WIRE TO WHITE HOUSE WIRE).

STEP No.4

Place canopy assembly so that screws protrude through holes in canopy.

STEP No.5

Secure fixture in place by turning barrel nuts onto the protruding screws.