

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.


1. Let the two supplied screws pass through the holes specially provided on the cross bar and lock them.
2. Fix the cross bar to the outlet box using the supplied screws.
3. Connect the wires of the system to the outlet box.

Make wire connections with wire nuts:

- Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
- Attach ribbed wire from light to white wire from power source with a wire nut.
- Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.

4. Put B on C, please hold B on C with hand, then lock B to C with A.
5. Aim the light body at the screw on the wall, and fix the light body on the wall by D.

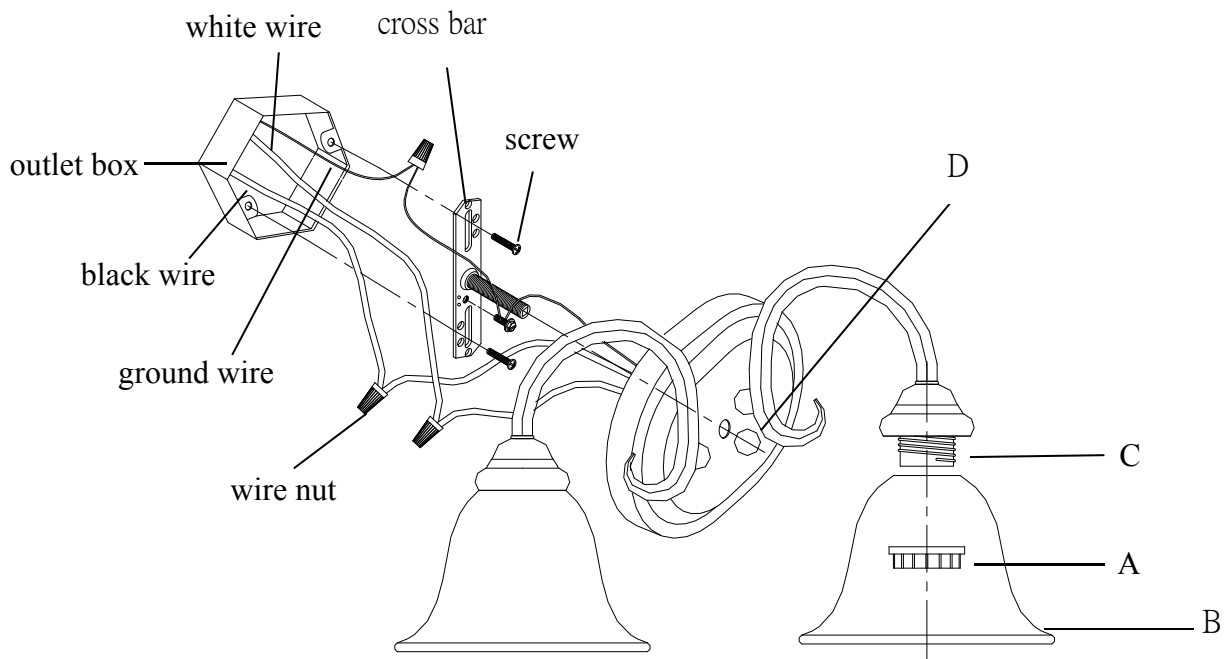

5110-2-44
5110-2-58
5110-2-60
5110-2-64
5110-2-70
5110-2-86
5110-2-95
5110-2-170
5110-2-186