


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

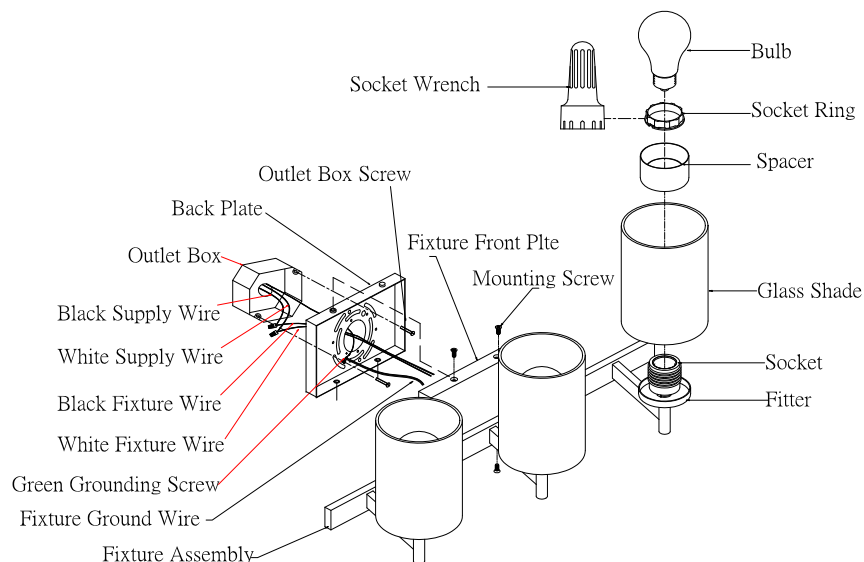

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to loose any small parts necessary for installation.
2. The Universal Crossbar contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in Outlet Box, and secure the Universal Crossbar to the Outlet Box by threading the two Outlet Box Screws through the Key Holes.
3. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
***Make sure all wire connectors are secured and do not easily pull off with the slight tug.
4. Once all wires are connected, tuck them carefully into Outlet Box.
5. Raise Back Plate on Fixture assembly over Universal Crossbar and tighten Back Plate to Universal Crossbar with four Fixture Mounting Screws on top and bottom of Back Plate.
6. Slide the Spacer and Socket Ring onto Socket and use Socket Ring to secure Glass Shade by threading Socket Ring onto Socket
7. Install Bulb to Socket. DO NOT EXCEED THE SPECIFIED WATTAGE!
8. Return the power to the Outlet Box and test fixture. Your installation is now complete.

520-x-xx