


## Installation Instruction

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**

"Note: The installation instruction is for 2, 3 and 4 lites, the drawing shown below is for representative only, not to match your new fixture."

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to loose any small parts necessary for installation.
2. Hold Back Plate up against the wall, aligning the two holes in the Junction Box with appropriate slots in the Back Plate. Then while the Back Plate is leveled horizontally, use a pen or pencil to make a mark on the wall at holes located near each end of Back Plate. Set aside the Back Plate and insert Wall Anchors into the two marks made on the wall.
3. Put the supply wires and ground wire from Outlet Box through center hole in Back Plate.
4. Attache the Back Plate to Outlet box by threading two Outlet Box Screws through the key holes on the Back Plate.
5. Connect the fixture wires to the Outlet Box wires as follows. Connect the White Fixture wire to the White Supply Wire, Connect the Black Fixture Wire to the Black Supply Wire. Make sure all wire Connectors are secure and do not easily pull off with the slight tug. If there is no Green Ground Wire from the Outlet Box, Connect the Fixture Ground Wire to the Back Plate with the Green Grounding Screw provided.
6. Tuck the connections carefully into Outlet Box.
7. Place the Fixture Front Plate over the Back Plate and tighten Fixture Front Plate to Back Plate with four Mounting Screws.
8. Slide Glass Shade and Spacer onto Socket, and secure Glass Shade by using Socket Wrench to secure Socket Ring onto Socket tightly. Install Bulb to Socket
9. Return power to the Outlet Box and test fixture. Your installation is now complete.

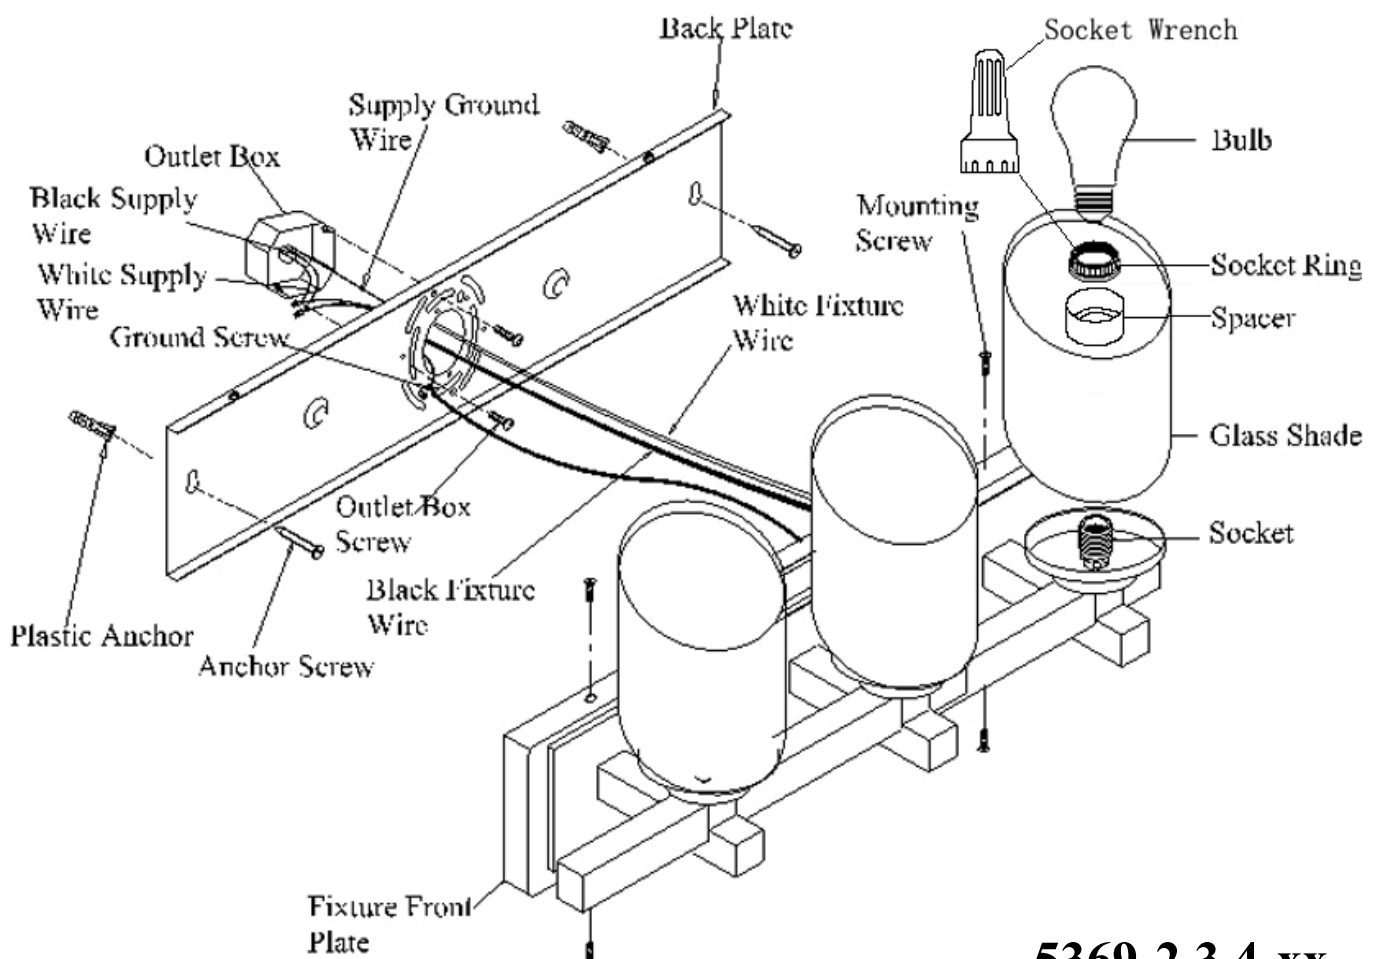

**5369-2,3,4-xx**  
**5369-2,3,4-2xx**