


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

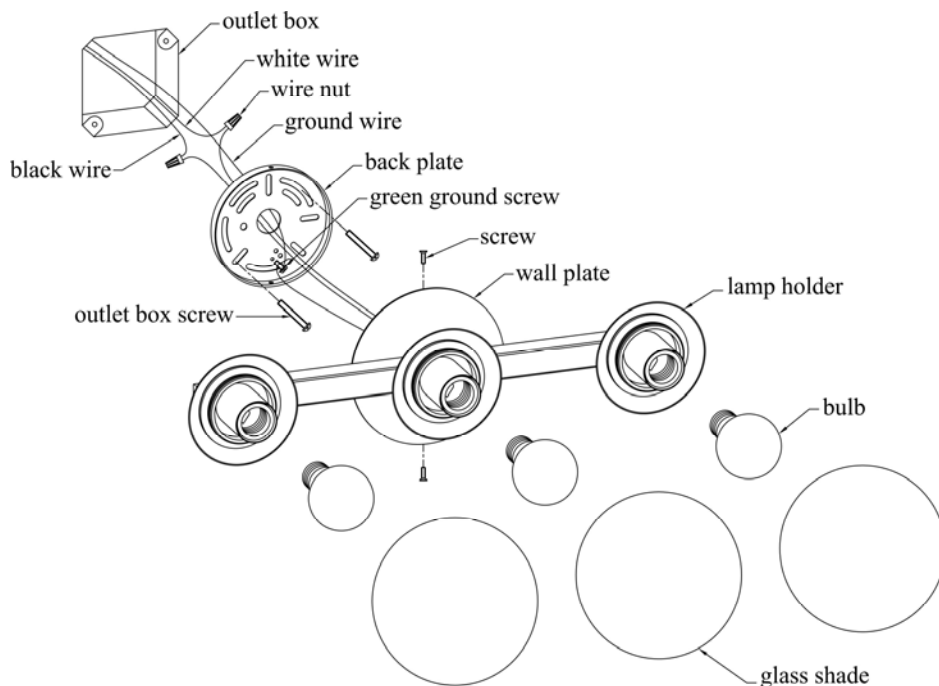

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
2. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
3. Attach the cross bar to the outlet box by using 2 outlet box screws upwards.

4. Make wire connections:

- Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
- Attach white or ribbed wire from light to white wire from power source with a wire nut.
- Attach black or smooth wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, round wire with ground wire.

*** Make sure all wire connectors are secured and do not easily pull off with the slight tug.

5. Attach the canopy to Outlet box then fasten it by using 2 mounting screws.
6. Install bulb. (Please do not exceed the maximum capacity which is recommended on the fixture.)
7. Install the glass shade.
8. Turn on the power at fuse or circuit box.

539-2-xx 539-3-xx 539-4-xx