


Installation Instruction

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to loose any small parts necessary for installation.
2. Put the supply wires and ground wire from Outlet Box through center hole in Back Plate.
3. Attache the Back Plate to Outlet box by threading two Outlet Box Screws through the key holes on the Back Plate.
4. Connect the fixture wires to the Outlet Box wires as follows. Connect the White Fixture wire to the White Supply Wire, Connect the Black Fixture Wire to the Black Supply Wire. Make sure all wire Connectors are secure and do not easily pull off with the slight tug. If there is no Green Ground Wire from the Outlet Box, Connect the Fixture Ground Wire to the Back Plate with the Green Grounding Screw provided.
5. Tuck the connections carefully into Outlet Box.
6. Place the Fixture Front Plate over the Back Plate and tighten Fixture Front Plate to Back Plate with four Mounting Screws
7. Slide Glass Shade and Spacer onto Socket, and secure Glass Shade by using Socket Wrench to secure Socket Ring onto Socket tightly. Install Bulb to Socket
8. Return power to the Outlet Box and test fixture. Your installation is now complete.

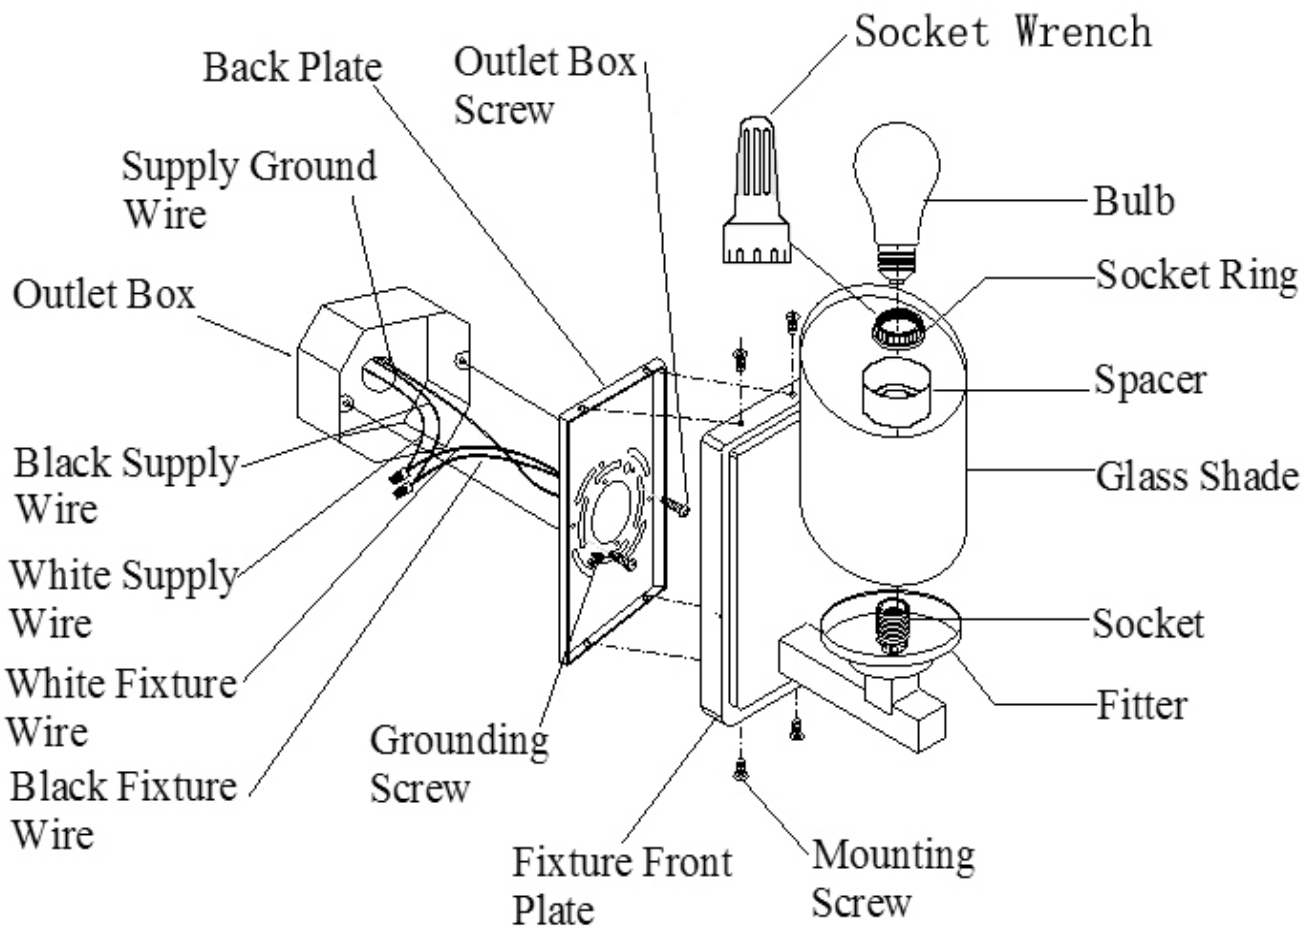

5669-1-xx, 5669-1-2xx