

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE :** Before installing, consult local electrical codes for wiring and grounding requirement

There are two installation methods to choose from: one is the fixed lighting installation method, and the other is the movable lighting installation method. You can select the method you need for installation.

## MOVABLE INSTALLATION METHOD:

- A. You can install the light fixture in any position you want.  
If the position has a junction box for installation, please refer "fixed installation method" steps below.
- B. You can install the light fixture in any position you want.  
If the position doesn't have a junction box for installation.
1. Drill two appropriate holes in the wall with a tool, place the anchors into the holes, then fix the backplate by screwing in the wood screws into the anchors until the screw heads are buttressed against the backplate.
2. Use the optional plug cord included to this fixture. Remove the cap on the backplate. Find a through-hole plug from part bag and plug it to the bottom of backplate.
3. Insert the plug cord into the hole at the bottom of the backplate and connect this cord with fixture's Neutral, Live and ground wires together.
4. Tuck the wire connection neatly into the faceplate.
5. Aim the faceplate to the two holes of screws on the backplate, and secure the balls onto the screws that extend through the holes of faceplate.
6. Install bulb. (not included)(Please do not exceed the maximum capacity which is recommended on the fixture.)
7. Put the diffuser(B) into the shade, then thread the finial(C) to fix the diffuser(B) tightly.
8. Plug the plug into the socket and turn on switch to light on the fixture.

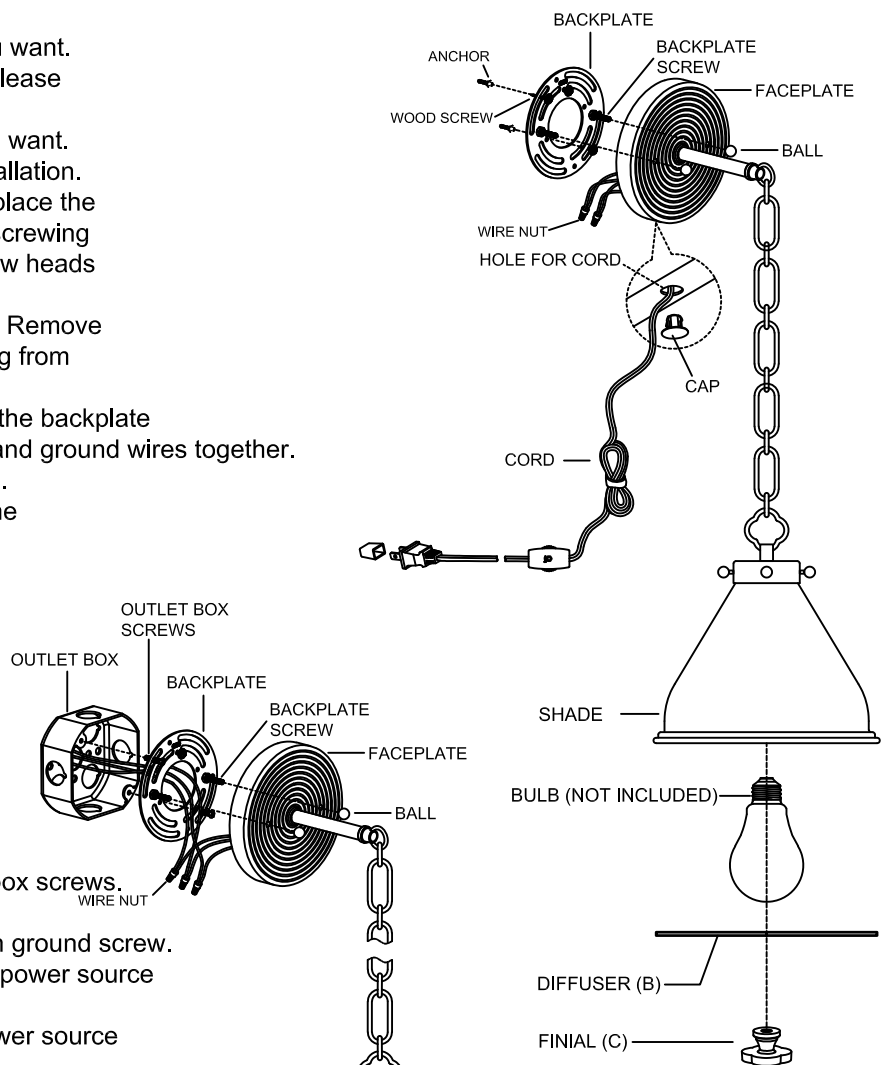


MOVABLE INSTALLTION METHOD

## FIXED INSTALLATION METHOD:

1. Fix the backplate to the outlet box using 2 outlet box screws.
2. Making wire connection:
  - Attach ground wire to the backplate with a green ground screw.
  - Attach Neutral wire from light to white wire from power source with a wire nut.
  - Attach Live wire from light to black wire from power source with a wire nut.

Observing : positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

3. Tuck the wire connections neatly into the outlet box.
4. Aim the faceplate to the two holes of screws on the backplate, and secure the balls onto the screws that extend through the holes of faceplate.
5. Install bulb. (not included)(Please do not exceed the maximum capacity which is recommended on the fixture.)
6. Put the diffuser(B) into the shade, then thread the finial(C) to fix the diffuser(B) tightly.
7. Turn on the power at fuse or circuit box.

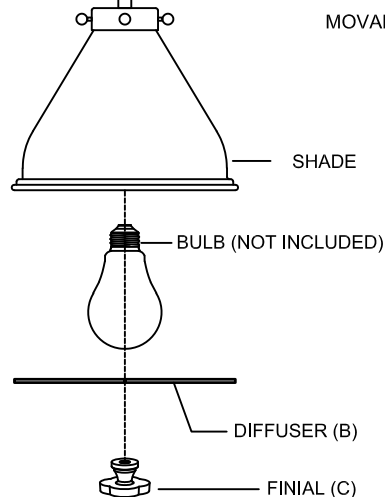

FIXED INSTALLTION METHOD

#5863-1-XXXX