


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread the suspended rod onto the nipple (A). Choose the suitable suspended rods that you need then insert the fixture wire through the suspended rods then thread swivel into the suspended rod tightly.
2. Attach the cross bar to the outlet box by using 2 outlet box screws upwards.
3. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
4. Tuck the wire connections neatly into the outlet box then fasten cable by strain relief.
5. Attach the canopy to the ceiling and secure with nut to the swivel tightly.
6. Attached spikes onto the globe.

600-6-xx	125pcs
600-8-xx	125pcs
600-10-xx	187pcs
7. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
8. Turn on the power at fuse or circuit box.

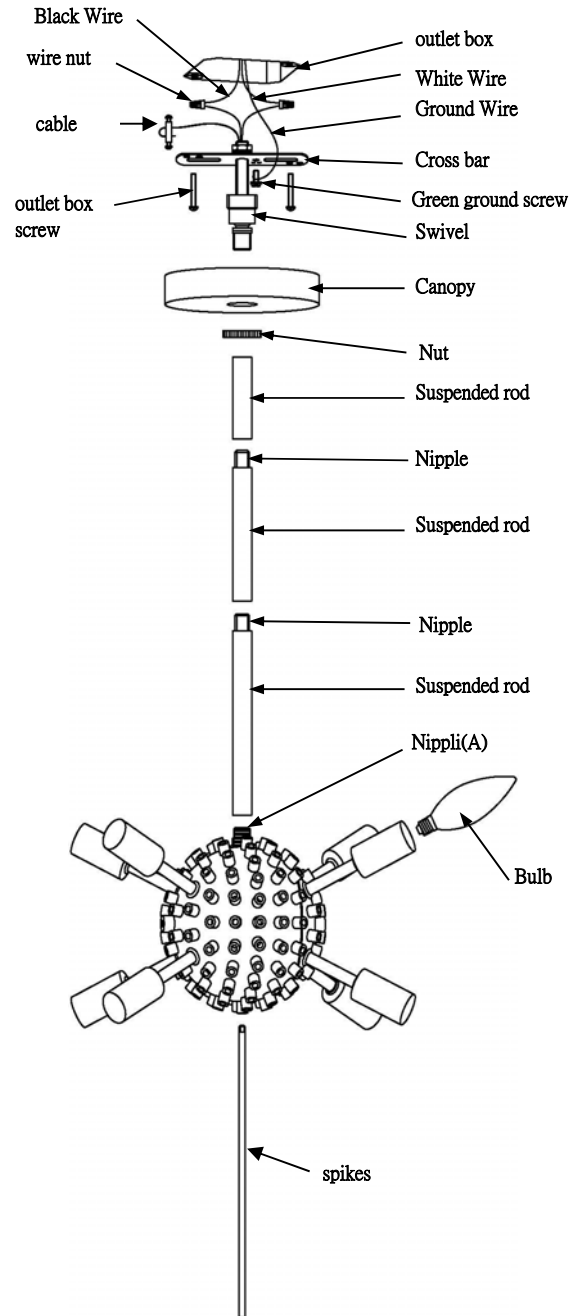

600-6-xx
600-8-xx
600-10-xx