

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:


TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the poly canopy, and then secure the poly canopy with the set nipple.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black,
white with white, green with green.

5. Raise the canopy to ceiling, secure it by screwing the collar loop.
6. Fix the loop on A.
7. Fix D on B with C.

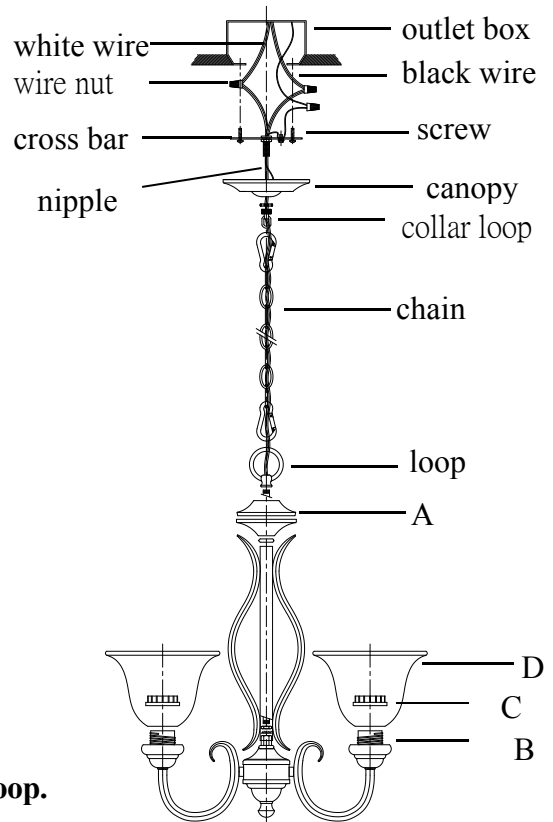

6010-3-44	6010-5-44
6010-3-58	6010-5-58
6010-3-60	6010-5-60
6010-3-64	6010-5-64
6010-3-86	6010-5-86
6010-3-95	6010-5-95
6010-3-170	6010-5-170
6010-3-186	6010-5-186