


ASSEMBLY AND INSTALLATION INSTRUCTIONS

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Carefully unpack and lay all parts on a clean, level surface.
2. Separate the arms (G) to ensure there is an equal space between them.
3. Determine the length of the chain you need, using pliers to disconnect the extra chain (E) and discard it away.
4. supply and ground wires through the holes in the other chains (E) and the Canopy (D).
5. Attach the mounting plate(A) to outlet box using two outlet box screws(C) upwards.
6. With the help of another person, carefully attach the top ends of chain(E) of the fixture body to the hook (F) on Canopy (D).
7. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut. (Or attach them to the cross bar with a green ground screw).
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.
8. Tuck the wire connections neatly into the outlet box.
9. Fix the canopy (D) on the support mounting plate (A) with mounting Screws (B), as shown in the figure.
10. Hang the crystal pendant (I) in the Loop (H) as shown.
11. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
12. Turn power on at fuse or circuit box.

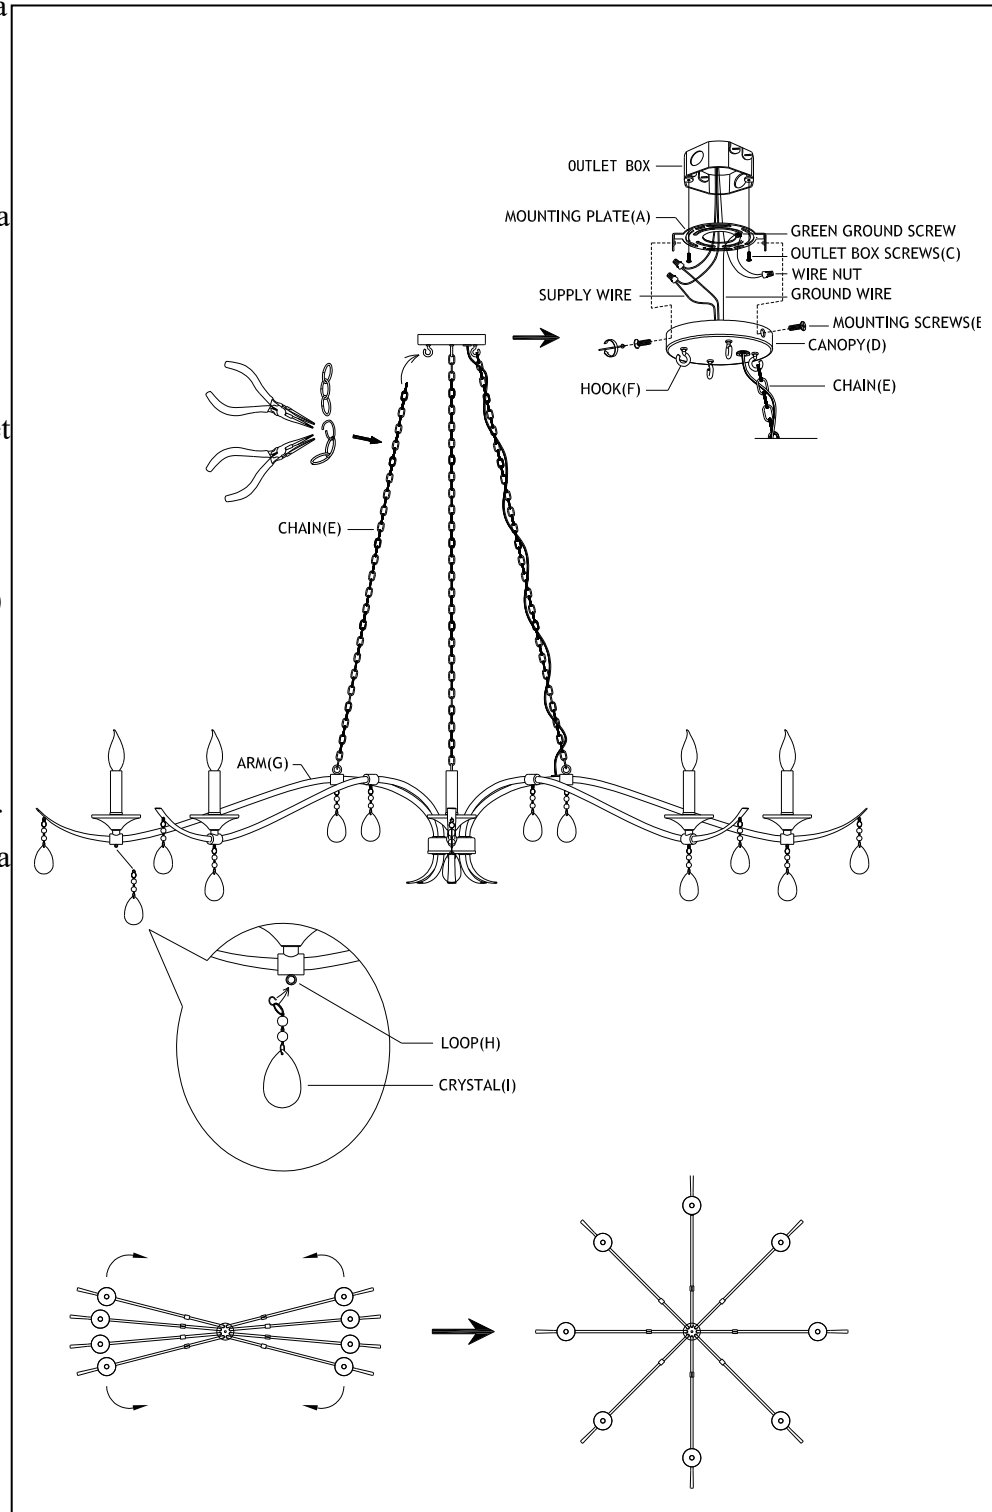

#602-6-59 #602-6-60

#602-8-59 # 602-8-60

#603-6-59 # 603-6-60