


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

## WARNING

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread the nipple(B) onto coupler(A), then thread the nut(B) onto nipple(B). Let the column pass through nipple(B), and secure it by nut(A). Put the pad onto the nipple(B).
2. Thread the nipple(C) onto the coupler(B), then thread the nut(C) onto nipple(C). Let the cover pass through the nipple(C), and fix it tight by finial.
3. Thread the fixture loop onto the nipple(B). Assemble the nipple(A) onto the cross bar and lock it in place by hex nut.
4. Attach the cross bar to outlet box using 2 outlet box screws upwards.
5. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
6. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple(A); secure the top loop to the nipple(A) and hang the chain to the top loop and the fixture loop.
7. Make wire connections:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
8. Tuck the wire connections neatly into the outlet box.
9. Attach the canopy to the ceiling, then secure it with top nut.
10. Put candle sleeve onto the socket.
11. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
12. Turn on the power at fuse or circuit box.

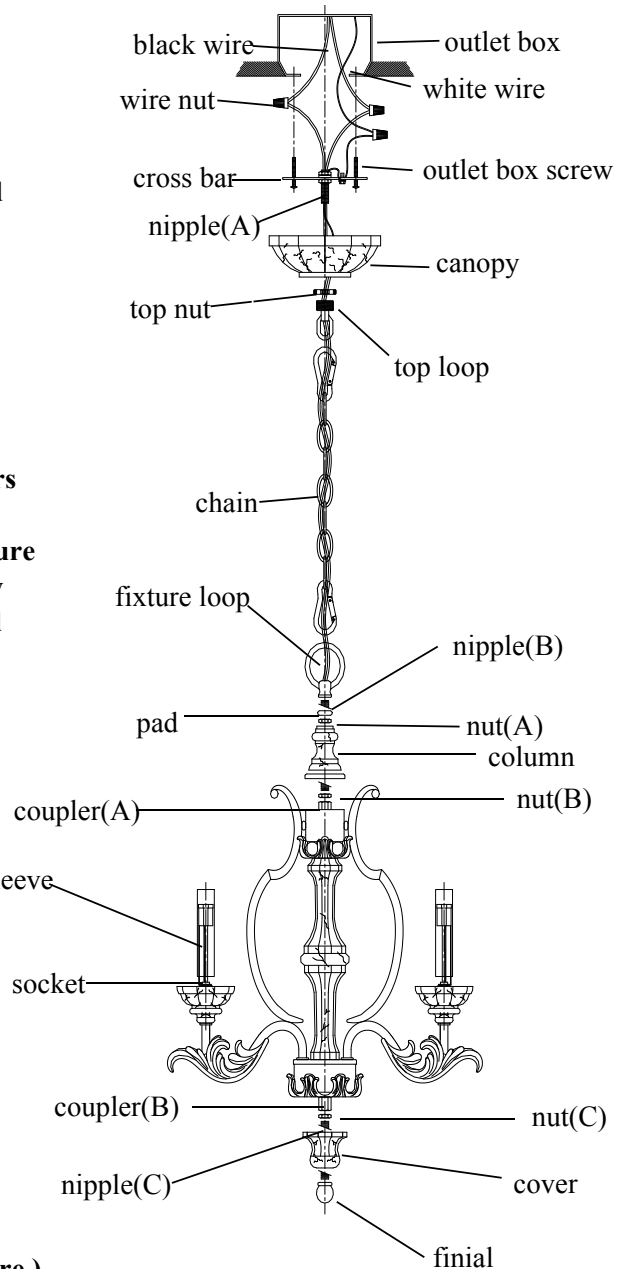

6037-4-70