


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

## Installation Steps:

1. Thread the suspended rod onto the nipple(A). Choose the suitable suspended rods that you needs then insert the fixture wire through the the suspended rods then thread swivel into the suspended rod tightly.
2. Assemble the nipple(B) onto the cross bar, and lock it in place by nex nut and hickey.
3. Thread 2 outlet box screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
4. Attach the cross bar to the outlet box by using 2 outlet box screws upwards.
5. Make wire connections with wire nuts:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
6. Tuck the wire connectons neatly into the outlet box and fasten wires by strainer.
7. Attach the canopy to the ceiling and secure them by swivel.
8. Insert the acrylic panel into the holder and fasten it with knob.
9. Put the candle sleeve onto the socket.
10. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
11. Turn on the power at fuse or circuit box.

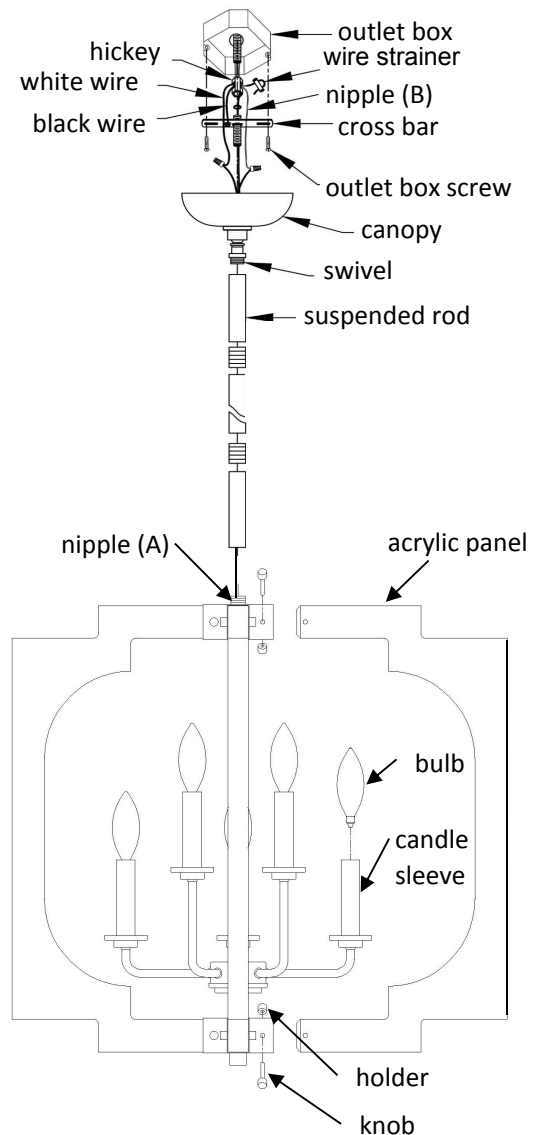

**605-8-80**  
**605-8-62**