


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK , BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

**NOTE :** Before installing ,consult local electrical codes for wiring and grounding requirement

1. Turn the Arms (A) to its proper position.
2. Slide the nipple ( B ) and secure them with fixture loop ( D ).
3. Thread the nipple ( M ) into the finial ( L ) and secure it with hex nut.
4. Slide the cap ( T ) onto the nipple ( M ) and thread them with finial ( U ).
5. Put glass shade ( F ) over the socket ( E ) and secure it with socket ring ( G ).
6. Assemble the Nipple ( A ) onto the Cross bar, and lock it in place by Hex nut ( A ).
7. Attach the Cross bar to outlet box using 2 outlet box screws upwards.
8. Determine the length of the Chain you need using pliers to disconnect the extra chain and discard it away.
9. Weave fixture wires and ground wire through the every other chain links, top nut, canopy, top loop and Nipple ( A ); secure the top loop to the Nipple ( A ) and hang the chain to the top loop and the fixture loop.
10. Make wire connections :
  - Attach ground wire to house ground wire using a wire nut ( or attach them to the cross bar with a green ground screw ).
  - Attach ribbed wire from light to white wire from power source with a wire nut.
  - Attach smooth wire from light to black wire from power source with a wire nut.
11. Tuck the wire connections neatly into the Outlet box.
12. Attach the canopy to the ceiling, then secure with top nut.
13. turn power on at fuse or circuit box.

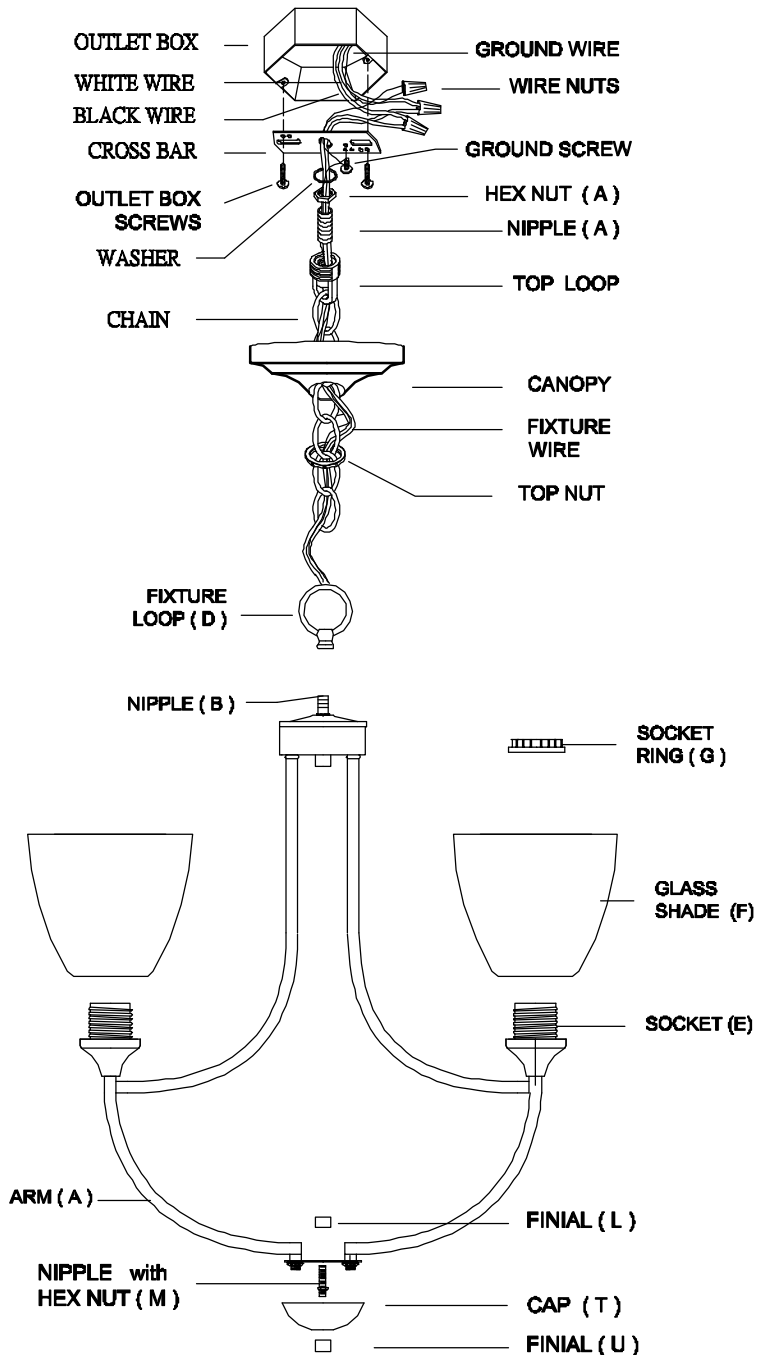

# 6059-3-XX

# 6059-3-2XX

# 6059-5-XX

# 6059-5-2XX

# 6059-8-XX

# 6059-8-2XX