




ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
2. Assemble the threaded nipple onto the cross bar and lock it in place by hex nut.
3. Attach the cross bar to outlet box by using two mounting screws upwards.
4. Fasten the threaded pipe to connector and tighten with hex nut then slide tube and cap through the threaded pipe and tighten with the threaded connector.
5. Determine the quantity/length of pipe/pipes needed.
6. Determine the length of chain needed, using pliers to disconnect the unneeded chain.
7. Feed the wires through the first pipe then thread the pipe onto the threaded connector.
8. Thread one threaded nipple onto the pipe to connect the next pipe length.
9. After last pipe is attached, attach fixture loop.
10. Connect desired chain length using chain links. Put one chain link on the fixture loop and the other one on screw collar.
11. Weave fixture wires and ground wire through the fixture loop, every other chain, through the screw collar, collar ring, canopy and threaded nipple on the cross bar.
12. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white or ribbed wire(neutral) from light to white wire from power source with a wire nut.
 - Attach black or smooth wire(hot) from light to black wire from power source with a wire nut.Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.
- ***Make sure all wire connectors are secured and do not easily pull off with the slight tug.
13. Tuck the wire connections neatly into the outlet box.
14. Attach the canopy to the ceiling then thread the screw collar onto the threaded nipple and secure the canopy with the collar ring.
15. Slide glass shade to socket and secure glass shade by threading spacer to socket tightly.
16. Install bulbs.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
17. Turn on the power at the fuse or circuit box.

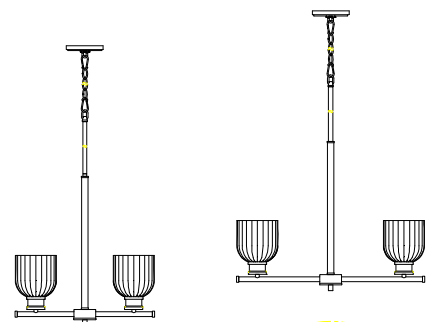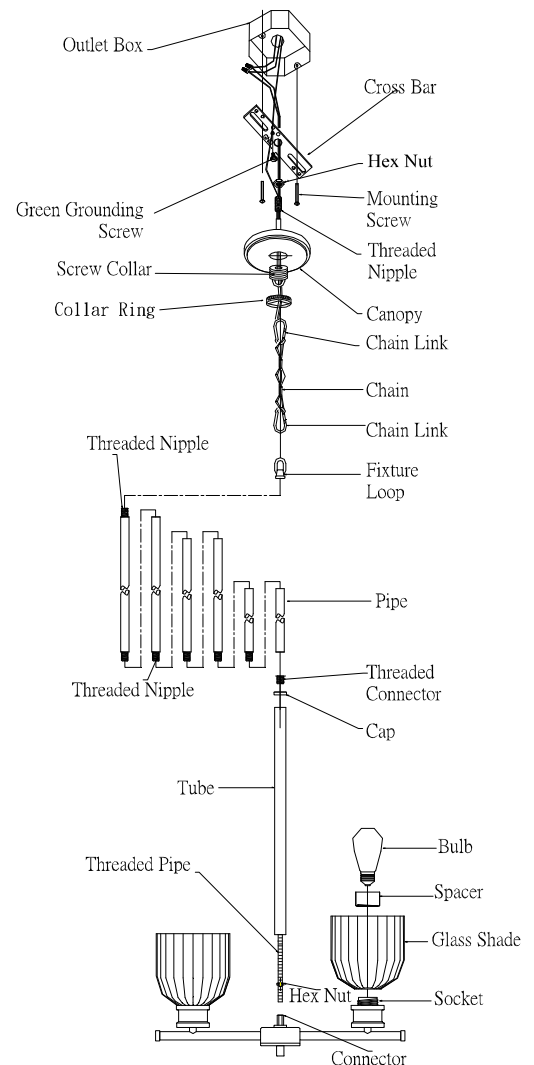

610-3



610-5

610-3-xx, 610-5-xx