


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Assemble the nipple A onto the cross bar and lock it in place by hex nut.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
4. Determine the length of stem/stems you need.
5. Thread one stem onto the fixture nipple, thread one stem nipple onto one stem and then thread the stem with nipple into top of the stems.
6. Feed fixture wires and ground wire through the stem and stem nipple.
7. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
8. Repeat step 5 to step 7 until all desired stems are connected, then thread the fixture loop onto top of the stems.
9. Hook chain links onto the both ends of the chain and hang the chain to the top loop and the fixture loop.
10. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple A and then secure the top loop to the nipple.
11. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.
12. Tuck the wire connections neatly into the outlet box.
13. Attach the canopy to the ceiling, and secure it with top nut.
14. Lock the fixture stem to the light cluster by the nipple B and C.
15. Put the light cluster on the nipple D and secure it with finial.
16. Put the candle sleeve onto the socket.
17. Lock the acrylic stem on the upper metal column and put the acrylic stem into the lower metal column one by one until all acrylic stems are locked.
18. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture).
19. Turn on the power at fuse or circuit box.

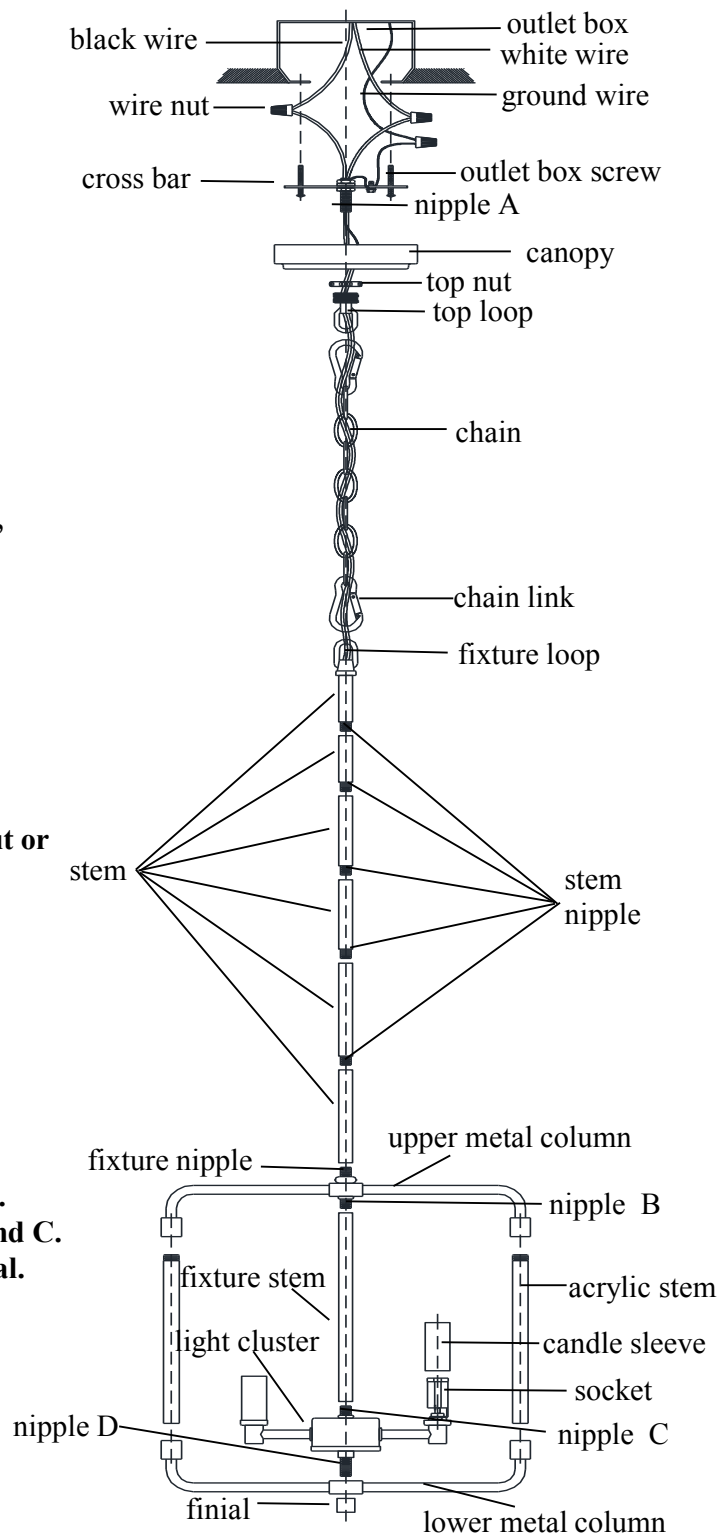

6114-3-65 6114-3-80

6114-6-65 6114-6-80

8114-6-65 8114-6-80