


## ASSEMBLY AND INSTALLATION INSTRUCTIONS

## WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

- 1. Assemble the nipple onto the cross bar and lock it in place by hex nut.**
- 2. Attach the cross bar to outlet box using 2 outlet box screws upwards.**
- 3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.**
- 4. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple; secure the top loop to the nipple and hang the chain to the top loop and the fixture loop.**
- 5. Make wire connections:**
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.**
  - Attach white wire from light to white wire from power source with a wire nut.**
  - Attach black wire from light to black wire from power source with a wire nut.**
- Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
- 6. Tuck the wire connections neatly into the outlet box.**
- 7. Attach the canopy to the ceiling, then secure it with top nut.**
- 8. Attach the fixture loop onto the nipple(A).**
- 9. Put the pad onto the nipple(B), secure it by finial.**
- 10. Attach the deco.drops onto the fixture in place.**
- 11. Put candle sleeve onto the socket.**
- 12. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)**
- 13. Turn on the power at fuse or circuit box.**

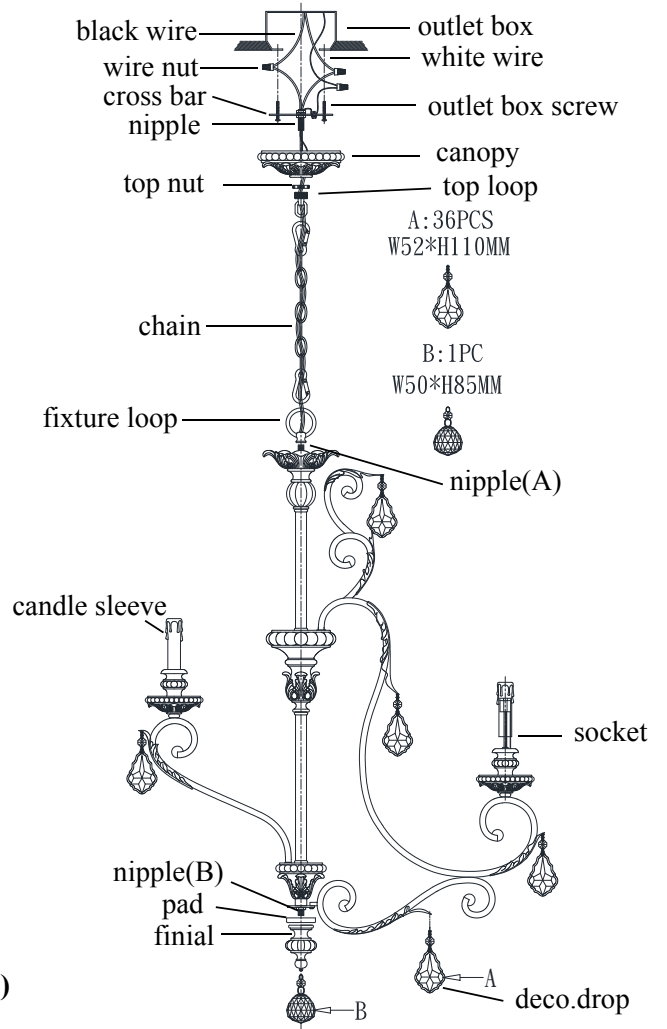

**6157-12-44**