


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Attach the cross bar to the outlet box by using 2 mounting screws.
2. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
3. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
4. Raise the canopy to ceiling, secure it by screwing the collar loop.
5. Fix A on loop.
6. Let C pass through B, then lock D on B, hang E on D.
7. Put F on G.
8. Hang crystal beads on arm heads.
9. Install bulbs taking care of the prescribed watt value.
10. Turn on the power at fuse or circuit box.

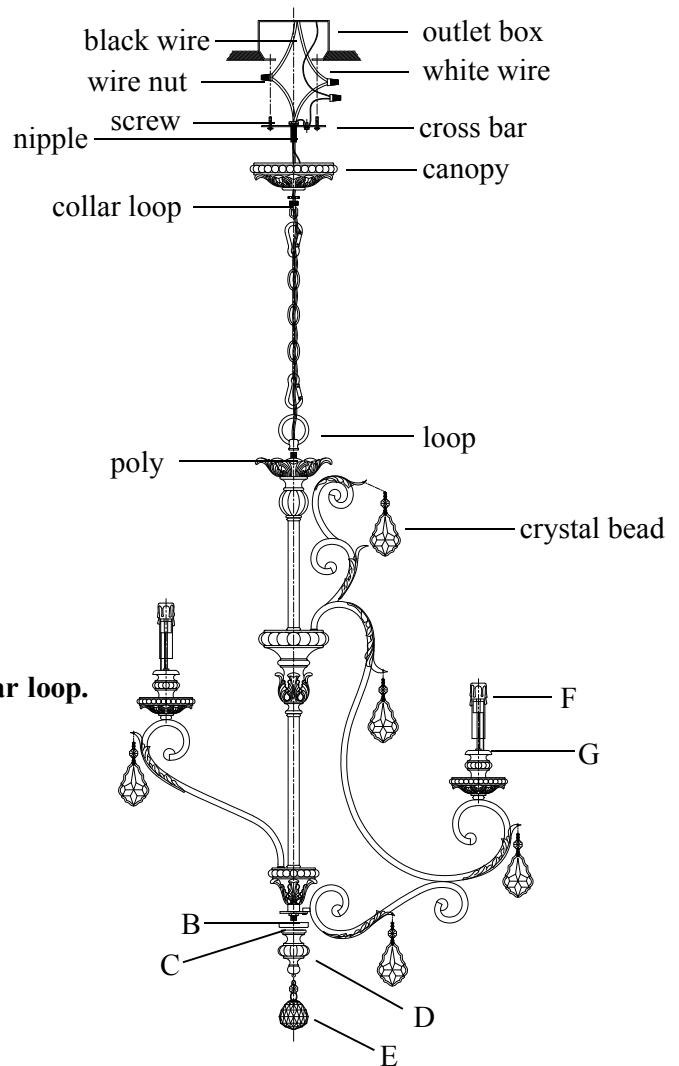

6157-9-44