

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Insert downward 2 screws to the mounting strap.
2. Attach the mounting strap to the outlet box by using 2 mounting screws.
3. Thread the fixture wire through the set nipple and the poly canopy, and then secure the poly canopy with the set nipple.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.
5. Fix the canopy to ceiling, blocking it with screw.
6. Hang the lamp on the loop and then secure with finial.
7. Fix A on B.
8. Fix F on G, then use D lock on G, use F fixation tight.
9. Fix C on light body.

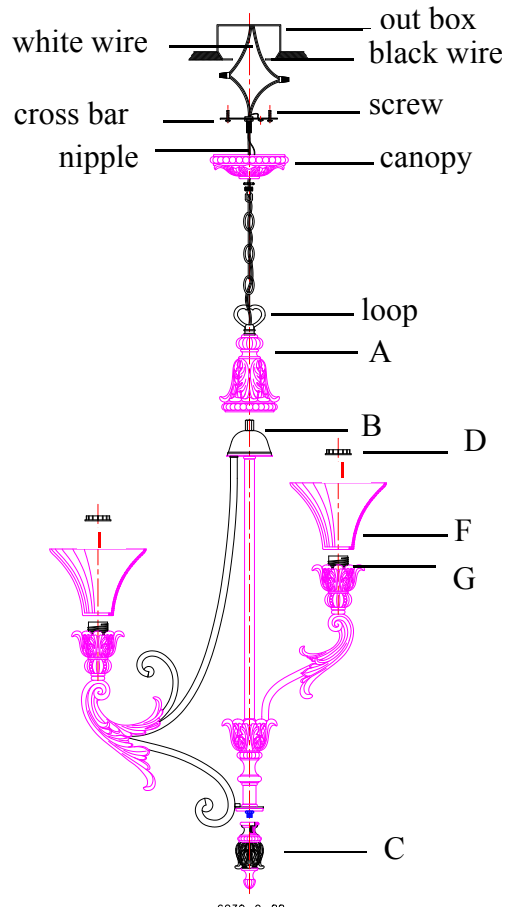

6230-9-88