
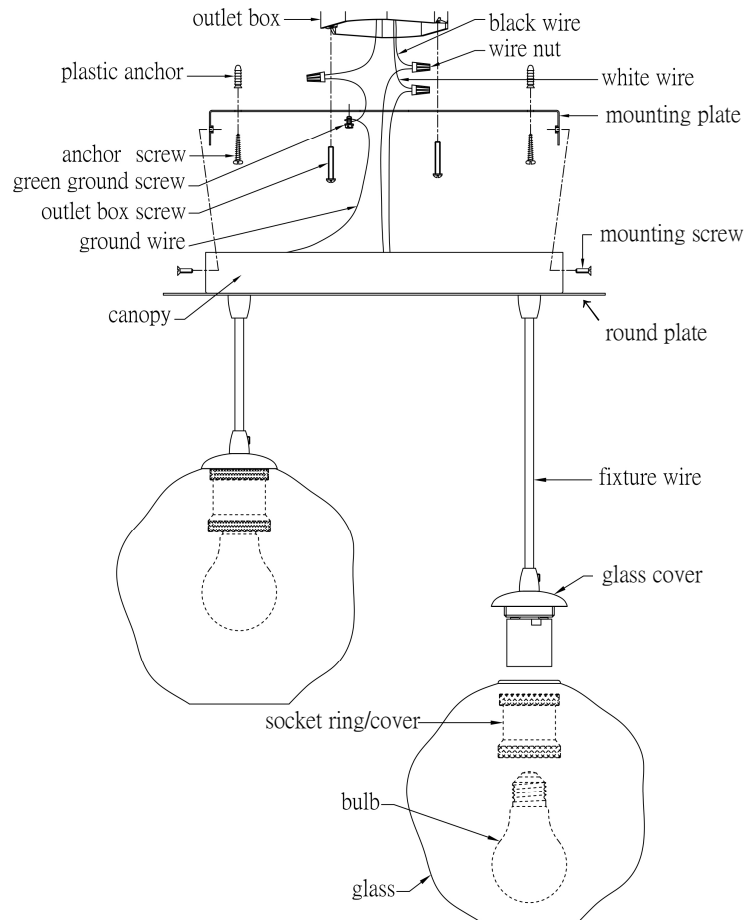


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

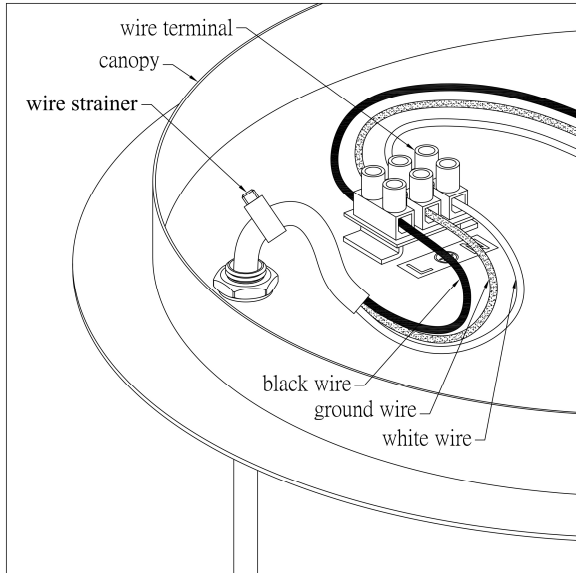

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Please adjust wire length by strainer according to the requirement.
3. Attach the mounting plate to the outlet box by using 2 outlet box screws.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - Attach white or ribbed wire(neutral) from light to white wire from power source with a wire nut.
 - Attach black or smooth wire(hot) from light to black wire from power source with a wire nut.Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.
*** Make sure all wire connectors are secured and do not easily pull off with the slight tug.
5. Tuck the wire connections neatly into the outlet box.
6. Attach the canopy with round plate to mounting plate, then tighten with 2 mounting screws.
7. Attach the glass to the glass cover and tighten with socket ring/cover.
8. Install bulb. (Please do not exceed the maximum capacity which is recommended on the fixture.)
9. Turn on the power at fuse or circuit box.