


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Extend the fixture arms to their proper positions.
2. Attach the cup to the nipple(C) and secure it with the finial.
3. Assemble the nipple(A) onto the cross bar and lock it in place by hex nut.
4. Attach the cross bar to outlet box using 2 outlet box screws upwards.
5. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
6. Thread the stem onto the nipple(B) and thread the fixture loop onto top of the stem.
7. Feed fixture wires and ground wire through the stem and the fixture loop.
8. Hook quick links onto the both ends of the chain and hang the chain to the top loop and the fixture loop.
9. Weave fixture wires and ground wire through the fixture loop, every other quick and chain links, top loop, top nut, canopy and nipple(A) and then secure the top loop to the nipple(A).
10. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.

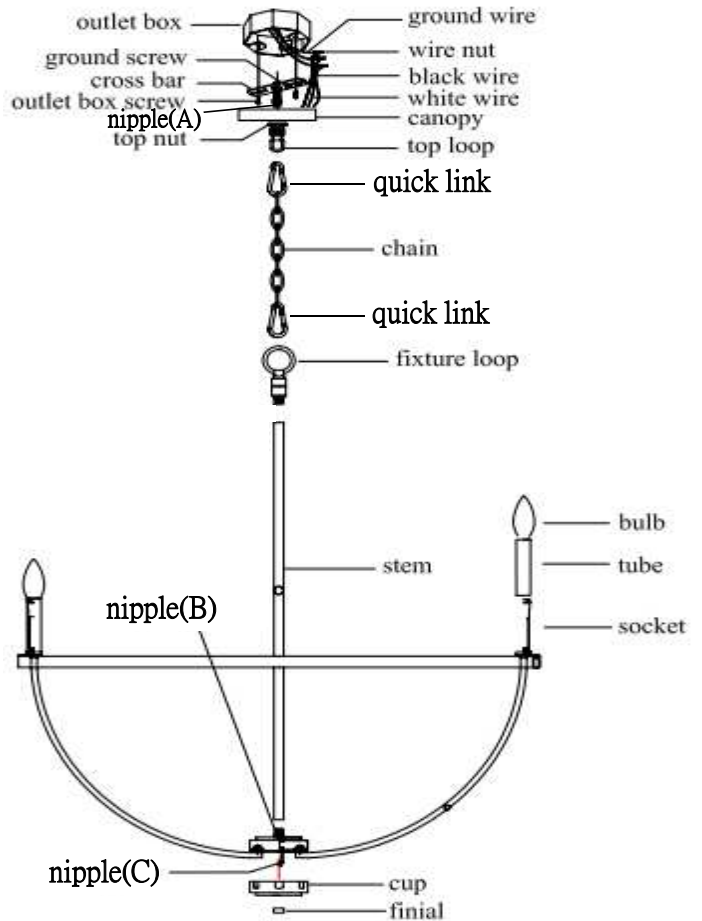

- Observing: positive wire with positive wire,
negative wire with negative wire, ground wire
with ground wire.
11. Tuck the wire connections neatly into the outlet box.
 12. Attach the canopy to the ceiling, then secure it with the top nut.
 13. Put the tube onto the socket.
 14. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
 15. Turn on the power at fuse or circuit box.

6374-5-xx

6374-8-xx

6374-12-xx