


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

## WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Attach the cross bar to the outlet box by using 2 mounting screws.
2. Thread the fixture wire through the set nipple(A) and the canopy, and then secure the canopy with the set nipple (A).
3. Make wire connections with wire nuts:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach ribbed wire from light to white wire from power source with a wire nut.
  - Attach smooth wire from light to black wire from power source with a wire nut.Observing the color code: black with black, white with white, green with green.
4. Raise the canopy to ceiling, secure it by screwing the collar loop.
5. Fix nipple (B) on loop by screwing.
6. Let poly cover pass through nipple (B), use nut, washer to make poly cover fixation tight.
7. Lock lamp body on poly cover and secure with finial.
8. Attach five glass shades to the lamp holders, attach the collar ring on to the glass shades, and secure with the collar rings.
9. Install bulbs taking care of the prescribed watt value.
10. Turn on the power at fuse or circuit box.

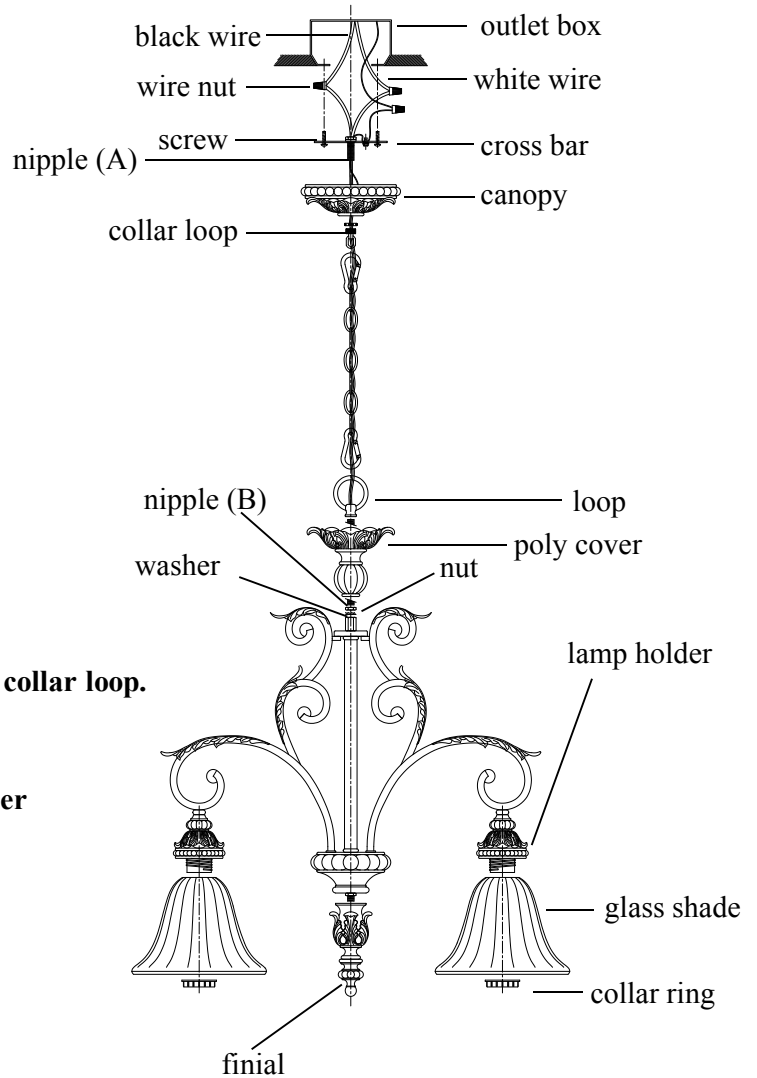

6457-5-44