


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK , BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

**NOTE :** Before installing ,consult local electrical codes for wiring and grounding requirement

1. Thread the Tube ( D ) onto the nipple ( C ),  
Then thread fixture loop (B) onto the nipple tightly.
2. Put space tube ( H ) onto  
the Cloth covers ( G ).
3. Assemble the Nipple ( A )  
onto the Cross bar , and lock it  
in place by Hex nut ( A ).
4. Attach the Cross bar to outlet  
box using 2 outlet box screws upwards.
5. Determine the length of the  
Chain you need .using pliers to  
disconnect the extra chain .and  
discard it away;
6. Weave fixture wires and ground  
wire through the every other chain  
links. Fixture loop , canopy ( D ). and  
hang the chain to the fixture loop .
7. Make wire connections :  
--- Attach ground wire to house  
ground wire using a wire nut ( or  
attach them to the cross bar with a  
green ground screw ).  
--- Attach ribbed wire from light to  
white wire from power source with a wire nut .  
--- Attach smooth wire from light to  
black wire from power source with a  
wire nut .
8. Tuck the wire connections neatly into  
the Outlet box ;
9. Attach the canopy ( I ) to the ceiling ,  
and let the nipple ( A ) protrude  
through the pre-drilled hole on the  
canopy ( I ) , and secure with finial ( H ) .
10. Turn power on at fuse or circuit box.

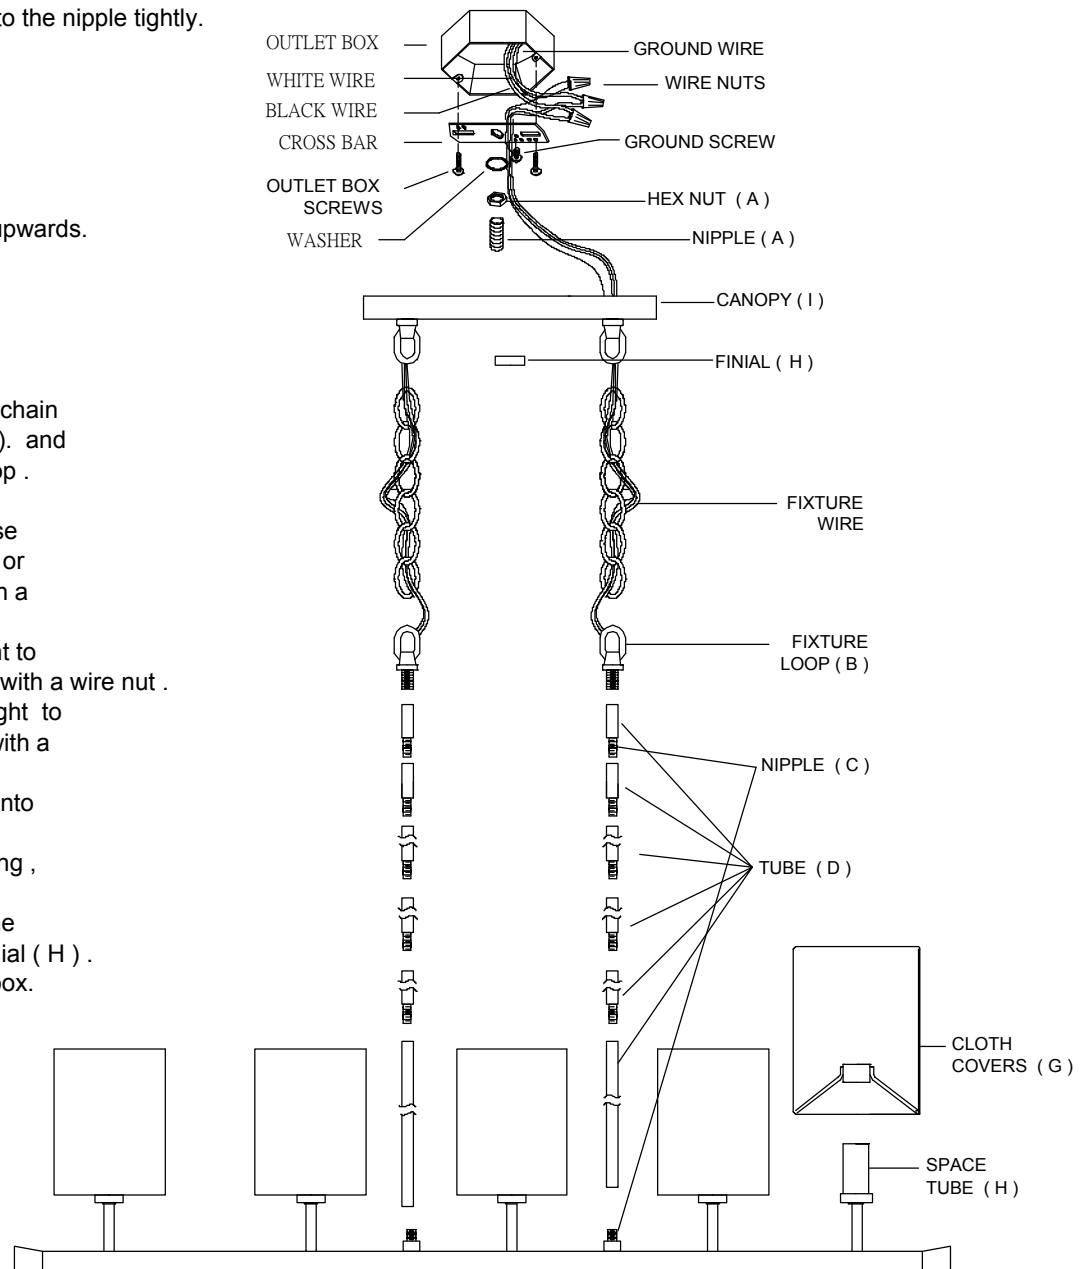

# 647-5-XX

# 647-7-XX