

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


## WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Determine the length of stem/stems you need.
4. Thread one stem onto the fixture nipple, thread one stem nipple onto one stem and then thread the stem with nipple into top of the stems.
5. Feed fixture wires and ground wire through the stem and stem nipple.
6. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
7. Repeat step 4 and step 6 until all desired, two sets of stems are connected, then thread the fixture loop onto top of the each stems.
8. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
9. Hook chain link onto the fixture loop and the top loop and hang the chain to the top loop and the fixture loop.
10. Weave fixture wires and ground wire through the fixture nipple, stem, stem nipple, fixture loop, every other chain links, top loop and canopy.
11. Make wire connections:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.

**Observing:** positive wire with positive wire,  
negative wire with negative wire, ground wire  
with ground wire.

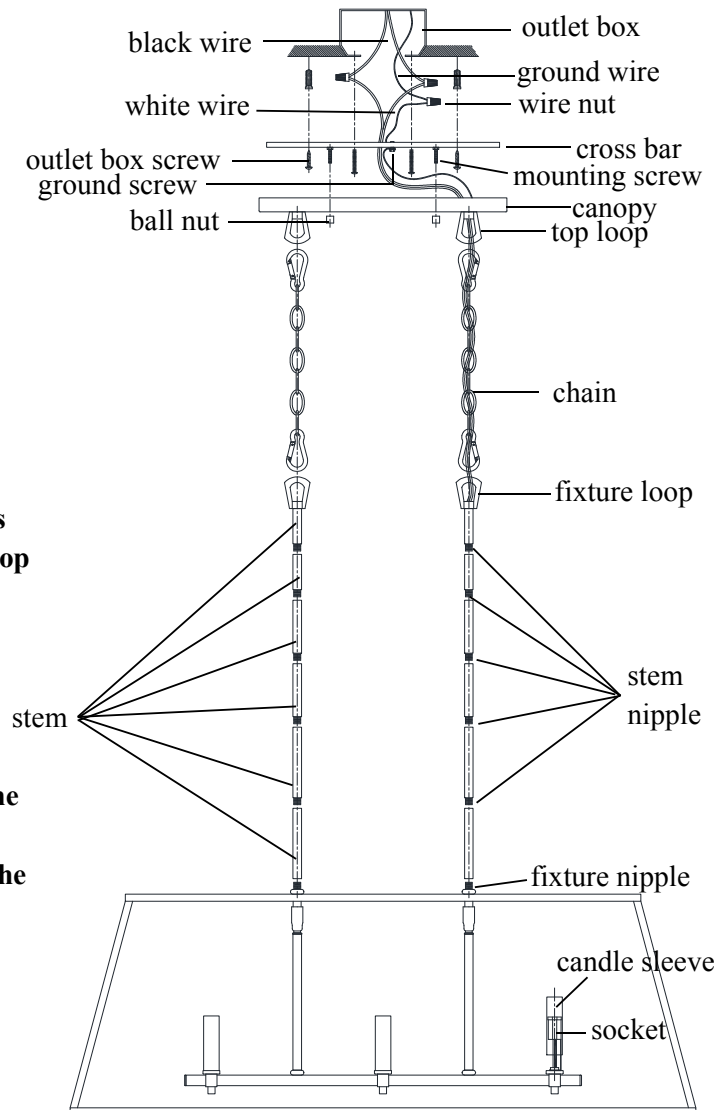

654-6-64	654-8-64	654-10-64
654-6-69	654-8-69	654-10-69
654-6-74	654-8-74	654-10-74
654-6-86	654-8-86	654-10-86

12. Tuck the wire connections neatly into the outlet box.
13. Attach the canopy to the ceiling and let the two mounting screws protrude through the two pre-drilled holes on the canopy, then fix it in place by ball nuts.
14. Put candle sleeve onto the socket.
15. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
16. Turn on the power at fuse or circuit box.