

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Insert downward 2 screws to the cross bar.
2. Attach the cross bar to the outlet box by using 2 mounting screws.
3. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.

Observing the color code: black with black, white with white, green with green.
4. Fix A to cross bar by B.
5. Hang D on C, E on F, then fix F on G.
6. Fix H on I.
7. Screw K on J and fix L on J.
8. N put on M and hold with hand, then lock N on M with O.
9. Install bulbs taking care of the prescribed watt value.
10. Turn on the power at fuse or circuit box.

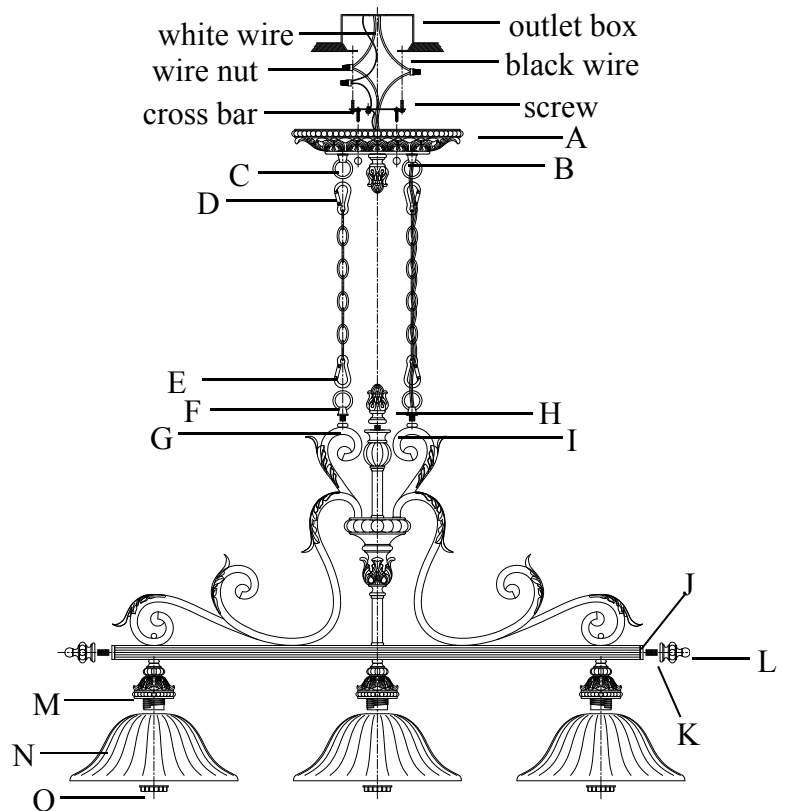

6557-3-44