


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
4. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop and canopy. Hang the chains to the top loops and fixture loops.
5. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.**Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
6. Tuck the wire connections neatly into the outlet box.
7. Attach the canopy to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled holes on the canopy and secure it with ball nuts.
8. Put metal pad & glass shade onto the socket and secure them with socket ring.
9. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture).
10. Turn on the power at fuse or circuit box.

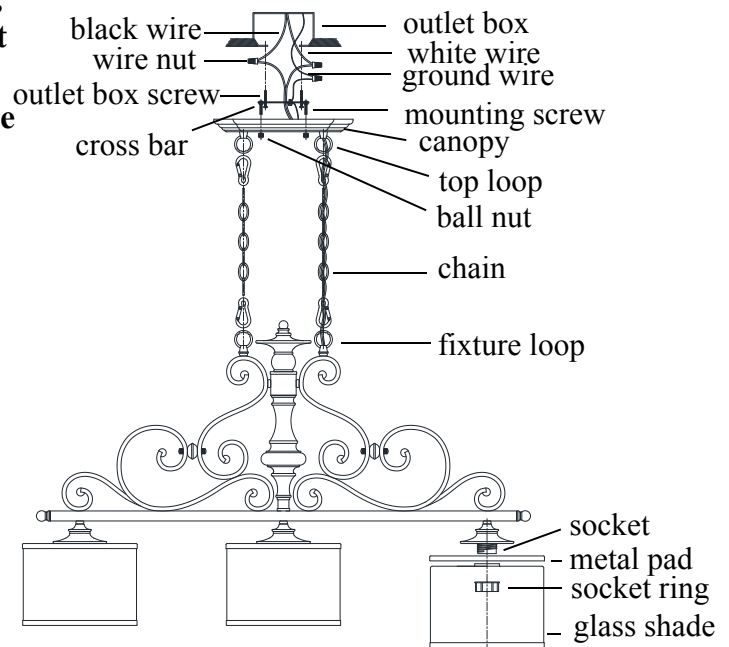

6573-3-39

6573-3-70