


## ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE :** Before installing ,consult local electrical codes for wiring and grounding requirement

1. Thread the Tube ( E ) onto the nipple ( F ),  
Then thread swivel ( G ) onto the nipple tightly.
2. Slide the steel bar ( J ), washer ( K ),  
onto the nipple ( F ) and secure them  
with HEX NUT ( L ) tightly.
3. Slide the Glass shade ( N )  
onto the socket ( O )  
and secure them with socket ring ( M ) .
4. Assemble the Nipple ( A )  
onto the Cross bar , and lock it  
in place by Hex nut ( A ) .
5. Attach the Cross bar to outlet  
box using 2 outlet box screws upwards.
6. Determine the length of the  
Chain you need .using pliers to  
disconnect the extra chain .and  
discard it away;
7. Weave fixture wires and ground  
wire through the every other chain  
links. Fixture loop , canopy ( D ) . and  
hang the chain to the fixture loop .
8. Make wire connections :
  - - - Attach ground wire to house  
ground wire using a wire nut ( or  
attach them to the cross bar with a  
green ground screw ).
  - - - Attach ribbed wire from light to  
white wire from power source with a wire nut .
  - - - Attach smooth wire from light to  
black wire from power source with a  
wire nut .
9. Tuck the wire connections neatly into  
the Outlet box ;
10. Attach the canopy ( I ) to the ceiling ,  
and let the nipple ( A ) protrude  
through the pre-drilled hole on the  
canopy ( I ) , and secure with finial ( H ) .
11. Turn power on at fuse or circuit box.

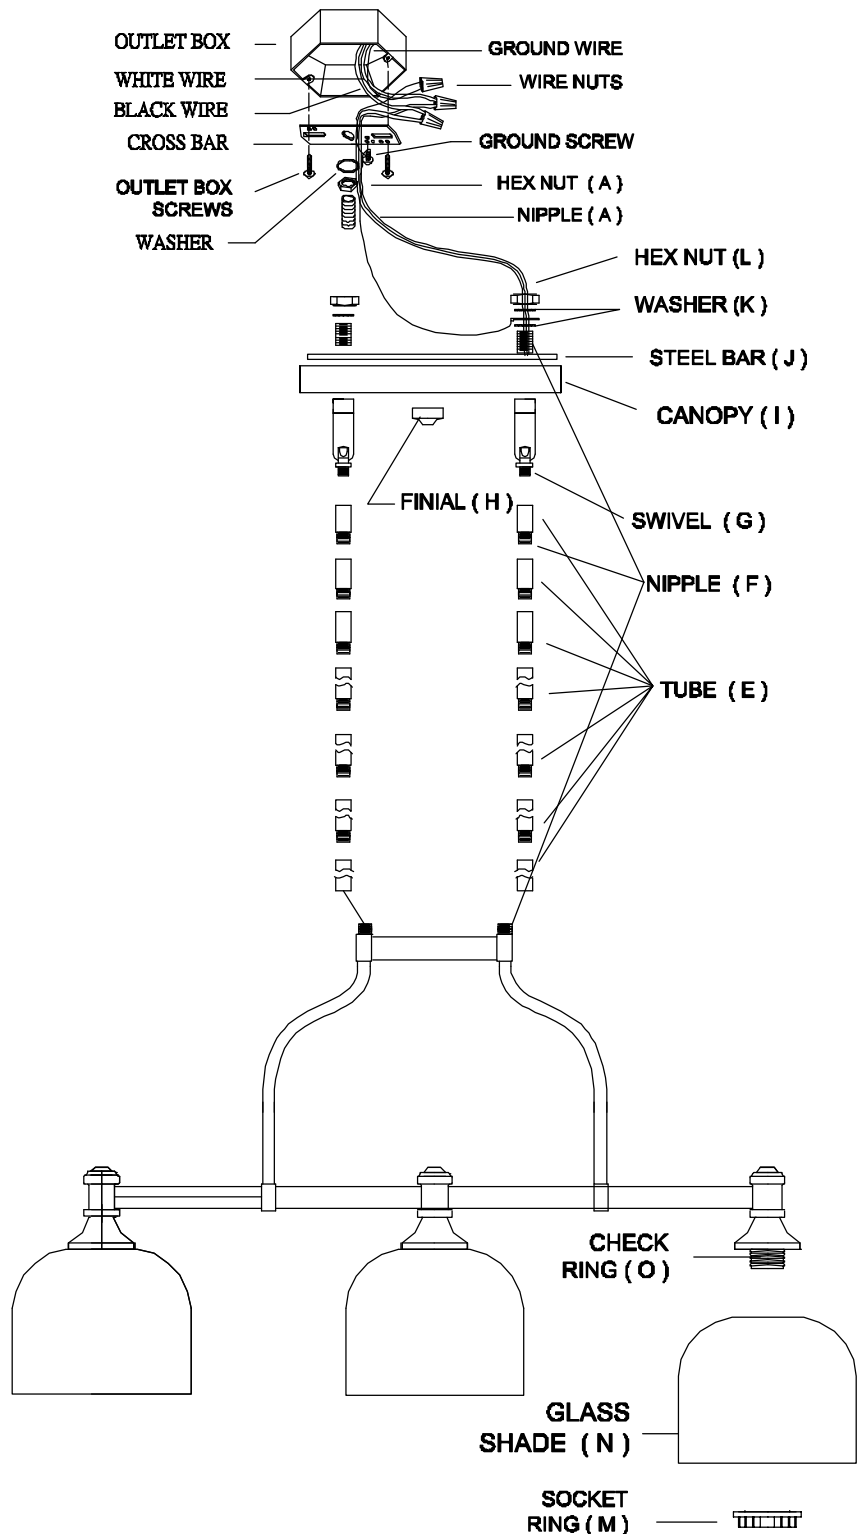

# 6911-3-XX

# 6511-3-1XX

# 6911-3-1XX

# 6611-3-1XX