


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Carefully unpack and lay all parts on a clean, level surface.
2. Separate the arms (O) to ensure there is an equal space between them.
3. Determine the desired length from the intended ceiling or mounting surface. Using the combination of three tube (F, H, I) lengths to give your desired length and screw them together using the nipples (G) provided on each end of the assembled tubes (F, H, I).
4. Feed the fixture wires from the coupler (K) through the and central post(J) tubes (F, H, I). Screw the components together until they are secured and do not come loose.
5. Unravel the supply power and ground wires and pass them through the center holes of tubes (F, H, I) and fixture loop (E) Then screw the tube and fixture loop (E) onto coupler (J).
6. Assemble the nipple (B) onto the crossbar and lock it in place with hex nut (C).
7. Attach the cross bar to the outlet box using 2 outlet box screws upwards.
8. Weave fixture wires and ground wire through every other chain link, top loop and the nipple (B), secure the top loop to the nipple (B) and hang the chain to the top loop and the fixture loop (E) with 2 quick links (D).
9. Make wire connections:
  - Attach ground wire to house ground wire using a wire nut. (Or attach them to the cross bar with a green ground screw).
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.
10. Tuck the wire connections neatly into the outlet box.
11. Attach the canopy to the ceiling, then secure with top nut.
12. Align the holes on the junction box cover (M) Lock the box cover (M) on the threaded rod (L) with the decorative nut (N).
13. Secure the backing ring (R) and glass shade (Q) to the socket (P) by using plastic wrench (T) tightening the socket ring (S).
14. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the fixture.)
15. Turn power on at fuse or circuit box.

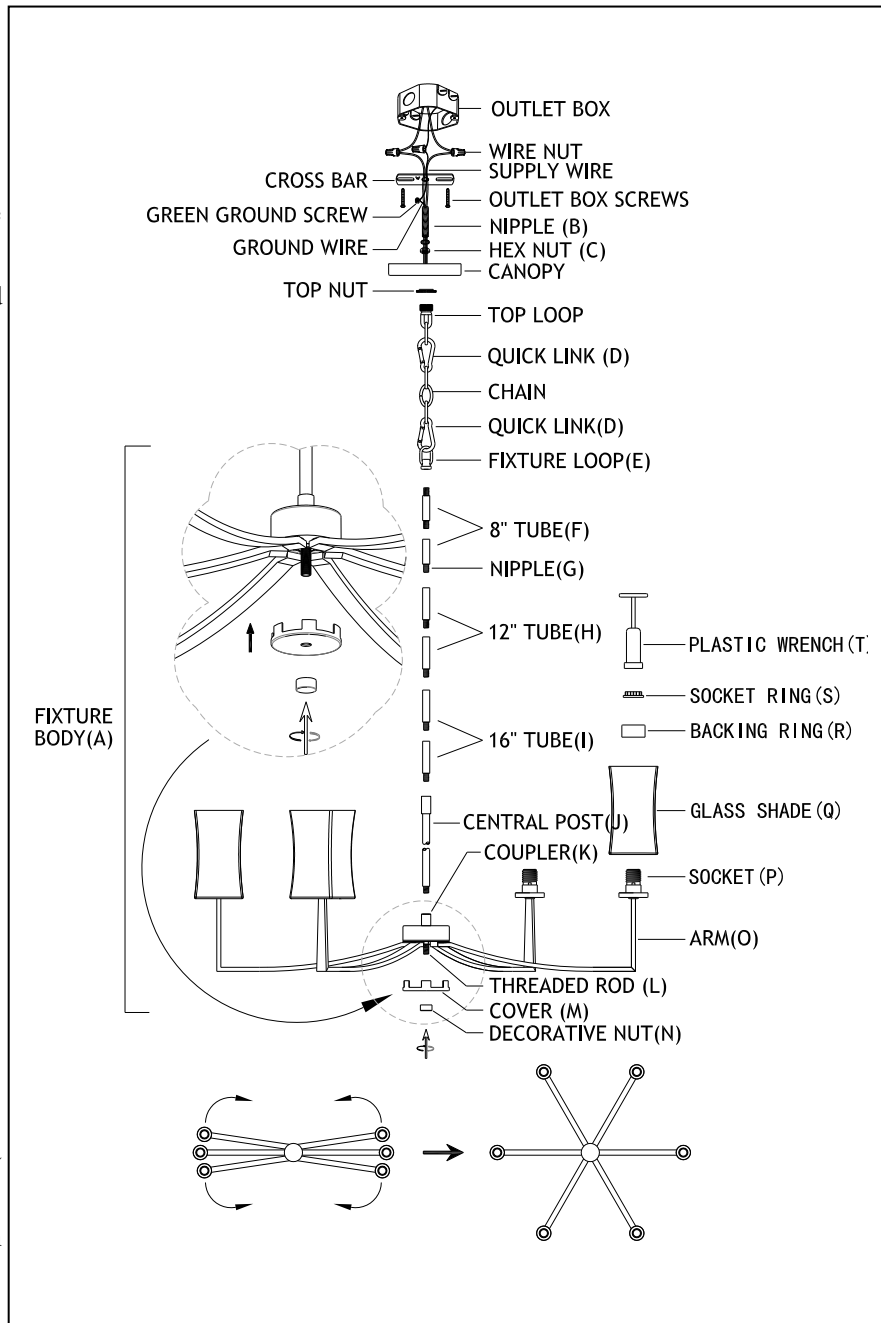

# 681-6-59 & # 681-6-74

# 681-8-59 & # 681-8-74