

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Assemble the nipple(A) onto the cross bar and lock it in place by hex nut.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
4. Determine the length of stem/stems you need.
5. Thread one stem onto the coupling, thread one stem nipple onto one stem and then thread the stem with nipple into top of the stems.
6. Feed fixture wires and ground wire through the stem and stem nipple.
7. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
8. Repeat step 5 and step 7 until all desired stems are connected, then thread the fixture loop onto top of the stems.
9. Hook chain link onto the fixture loop (A) and the top loop and hang the chain to the top loop and the fixture loop.
10. Weave fixture wires and ground wire through the fixture loop, ever other chain links, top loop, top nut , canopy and nipple and then secure the top loop to the nipple.
11. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
12. Tuck the wire connections neatly into the outlet box.
13. Attach the canopy to the ceiling, then secure it with top nut.
14. Attach the canopy to the ceiling, and secure it with ball nut .
15. Install the stem into the coupling .
16. Put the glass shade onto the cap and secure it by the tube.
17. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
18. Turn on the power at fuse or circuit box.

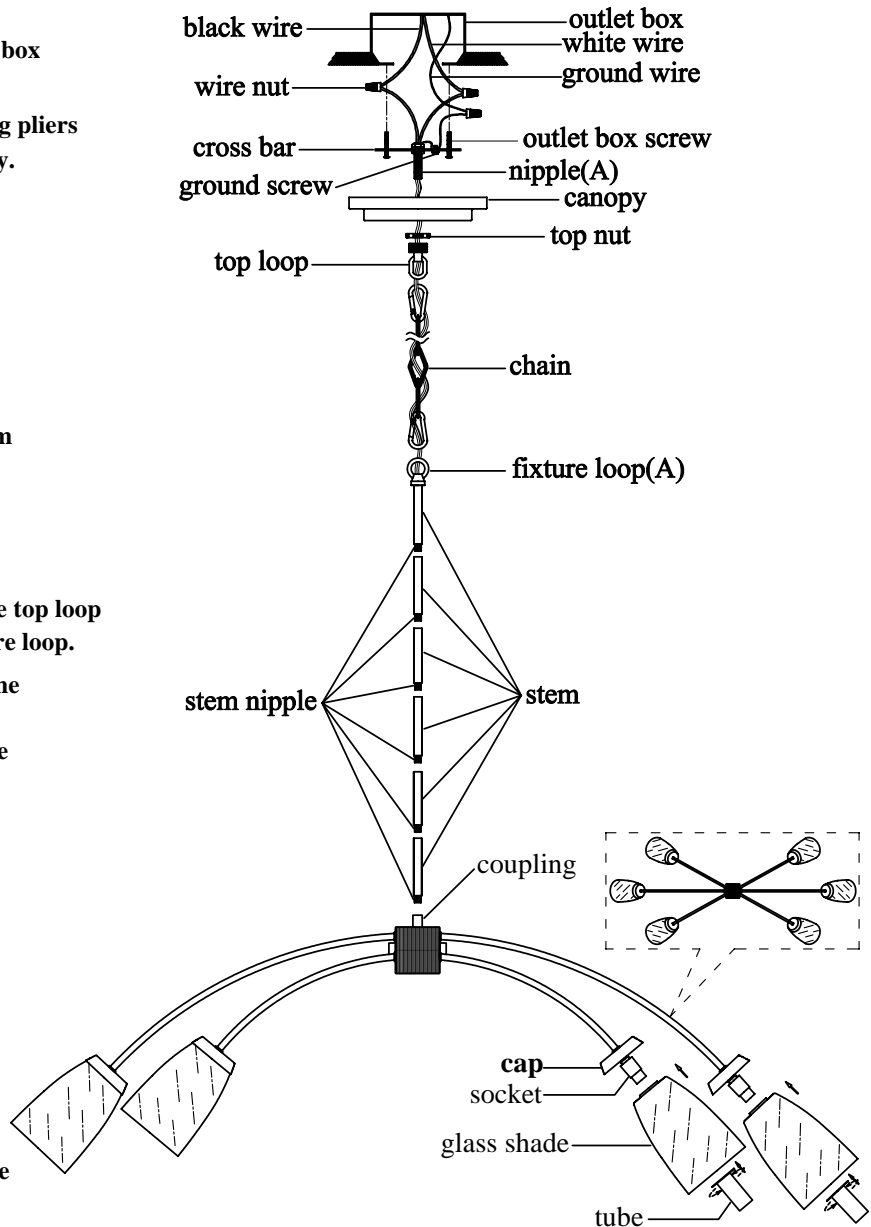

6877-6-59/80