

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:


TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Determine the length of stem/stems you need.
2. Thread one stem nipple onto one stem and thread stem with nipple into top of the fixture frame.
3. Feed fixture wires and ground wire through the stem and stem nipple.
4. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
5. Repeat step 2 and step 3 until all desired stems are connected.
6. Thread the swivel into top of the stems tightly.
7. Weave fixture wires and ground wire through the swivel and canopy.
8. Thread two mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
9. Attach the cross bar to the outlet box using 2 outlet box screws upward.
10. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.

Observing : positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

11. Tuck the wire connections neatly into the outlet box.
12. Attach the canopy to the ceiling and let the two mounting screws protrude through the two pre-drilled holes on the canopy and secure it with ball nuts.
13. Put the candle sleeve onto the socket.
14. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
15. Turn on the power at fuse or circuit box.

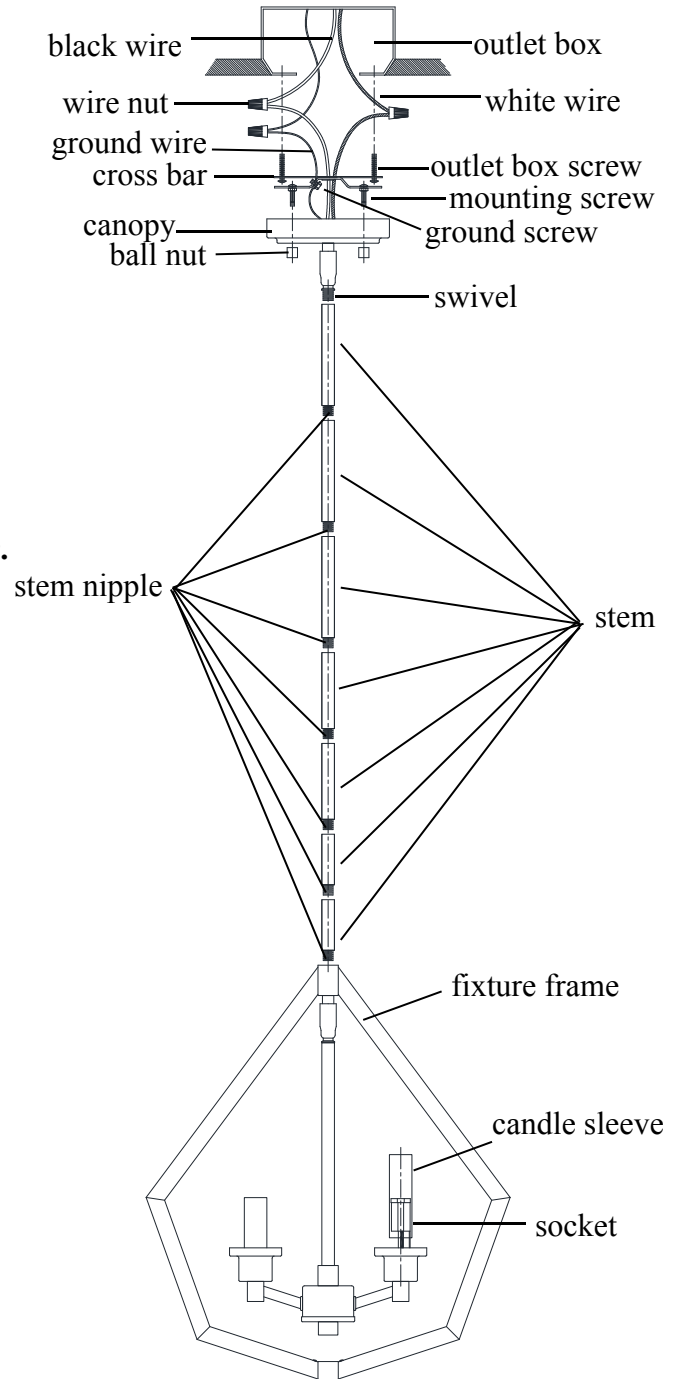

699-3-65

699-3-86