



7127-4-69

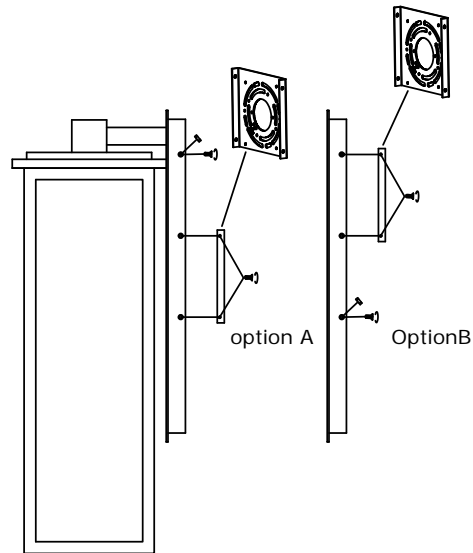

Customer choose the option A or option B for their requirements
No matter which option you choose, the extra screws and nuts (pre-install in the backplate) should fill in the unused mounting holes

Relamping instructions

- 1) Remove top cover or fixture cage by unscrewing finial or screws
- 2) Replace bulbs
- 3) Replace top cover or fixture cage and tighten screws

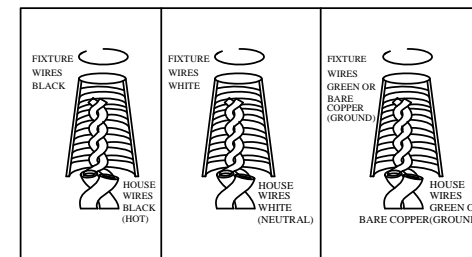

american
lighting
association

WALL MOUNT