



760-24-69



Customer choose the option A or option B for their requirements


## Relamping instructions

- 1) Remove top cover or fixture cage by unscrewing finial or screws
- 2) Replace bulbs
- 3) Replace top cover or fixture cage and tighten screws




american lighting association

WALL MOUNT

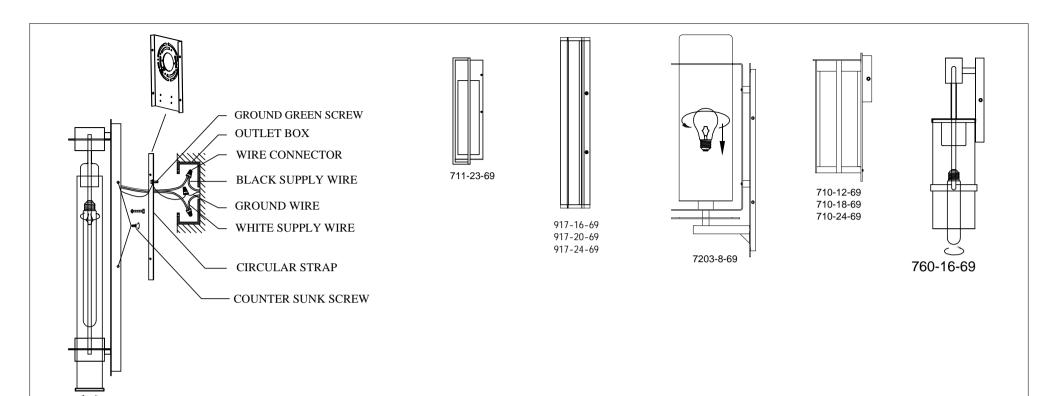


## 708-24-69



Customer choose the option A or option B for their requirements

## Relamping instructions

- 1) Remove top cover or fixture cage by unscrewing finial or screws
- 2) Replace bulbs
- 3) Replace top cover or fixture cage and tighten screws



american lighting association

WALL MOUNT