


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread the tubes one by one onto the nipple, then thread swivel into the tube tightly.
2. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
3. Attach the cross bar to outlet box using 2 outlet box screws upwards.
4. Weave fixture wires and ground wire through the every tube, swivel and canopy.
5. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
6. Tuck the wire connections neatly into the outlet box.
7. Attach the canopy to the ceiling and let the two mounting screws protrude through the two pre-drilled keyholes on the canopy, then fix it in place with ball nuts.
8. Install bulb. (not included)(Please do not exceed the maximum capacity which is recommended on the fixture.)
9. Attach the glass shade onto the fixture. Put the plastic pads on the screw of the cylinder nuts, then fix the glass shade by screwing cylinder nuts tight.
10. Turn on the power at fuse or circuit box.

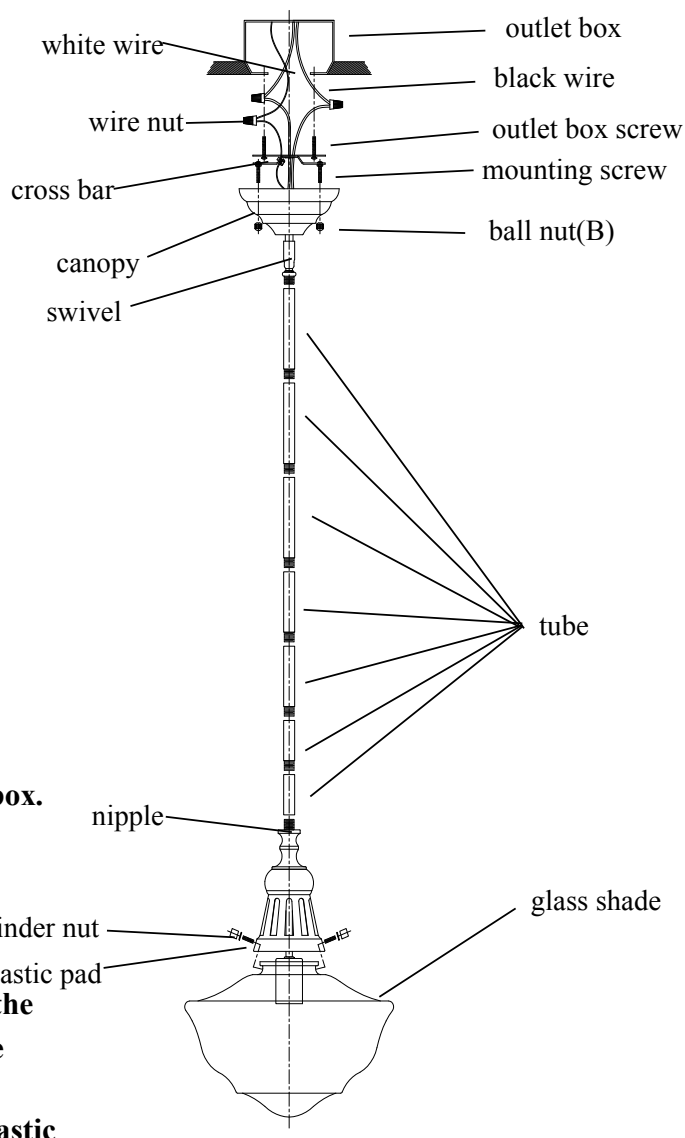

801-124786
801-12-14
801-12-86
801-12-186
801-154786
801-15-14
801-15-86