


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

**NOTE :** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Pass the stem(G) through the hole in the glass shade(H), then screw the stem(G) tightly into the fixture. Finally, tighten the nut(I) onto the stem(G) to secure the glass shade(H) in place.
  2. Place the metal shade(L) over the glass shade(H), aligning the stem(K) on the metal shade(L) with another hole on the glass shade(H). Then, secure the metal shade(L) by tightening the nut(J) onto the stem.
  3. Assemble the nipple(B) onto the cross bar and lock it in place by hex nut(A).
  4. Attach the cross bar to outlet box using 2 outlet box screws upwards.
  5. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
  6. Determine the quantity/length of stem/stems(E) needed.
  7. Thread one stem(E) onto the nipple(M) and thread one stem nipple(D) onto the stem(E).
  8. Feed fixture wires and ground wire through the nipple(M) or stem nipple(D) and stem(E).
  9. Thread the other stem nipple(D) onto the other stem(E) and thread them onto top of the stem(E).
  10. Repeat step 6 and step 7 until all desired stems(E) are connected, then thread the fixture loop(C) onto top of the stems(E).
  11. Hook quick links onto the both ends of the chain and hang the chain to the top loop and the fixture loop(C).
  12. Weave fixture wires and ground wire through the fixture loop(C), every other quick and chain links, top nut, canopy, top loop and nipple(B).
  13. Make wire connections:
    - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
    - Attach white wire from light to white wire from power source with a wire nut.
    - Attach black wire from light to black wire from power source with a wire nut.
- Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
14. Tuck the wire connections neatly into the outlet box.
  15. Attach the canopy to the ceiling, then secure it with the top nut.
  16. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
  17. Turn on the power at fuse or circuit box.

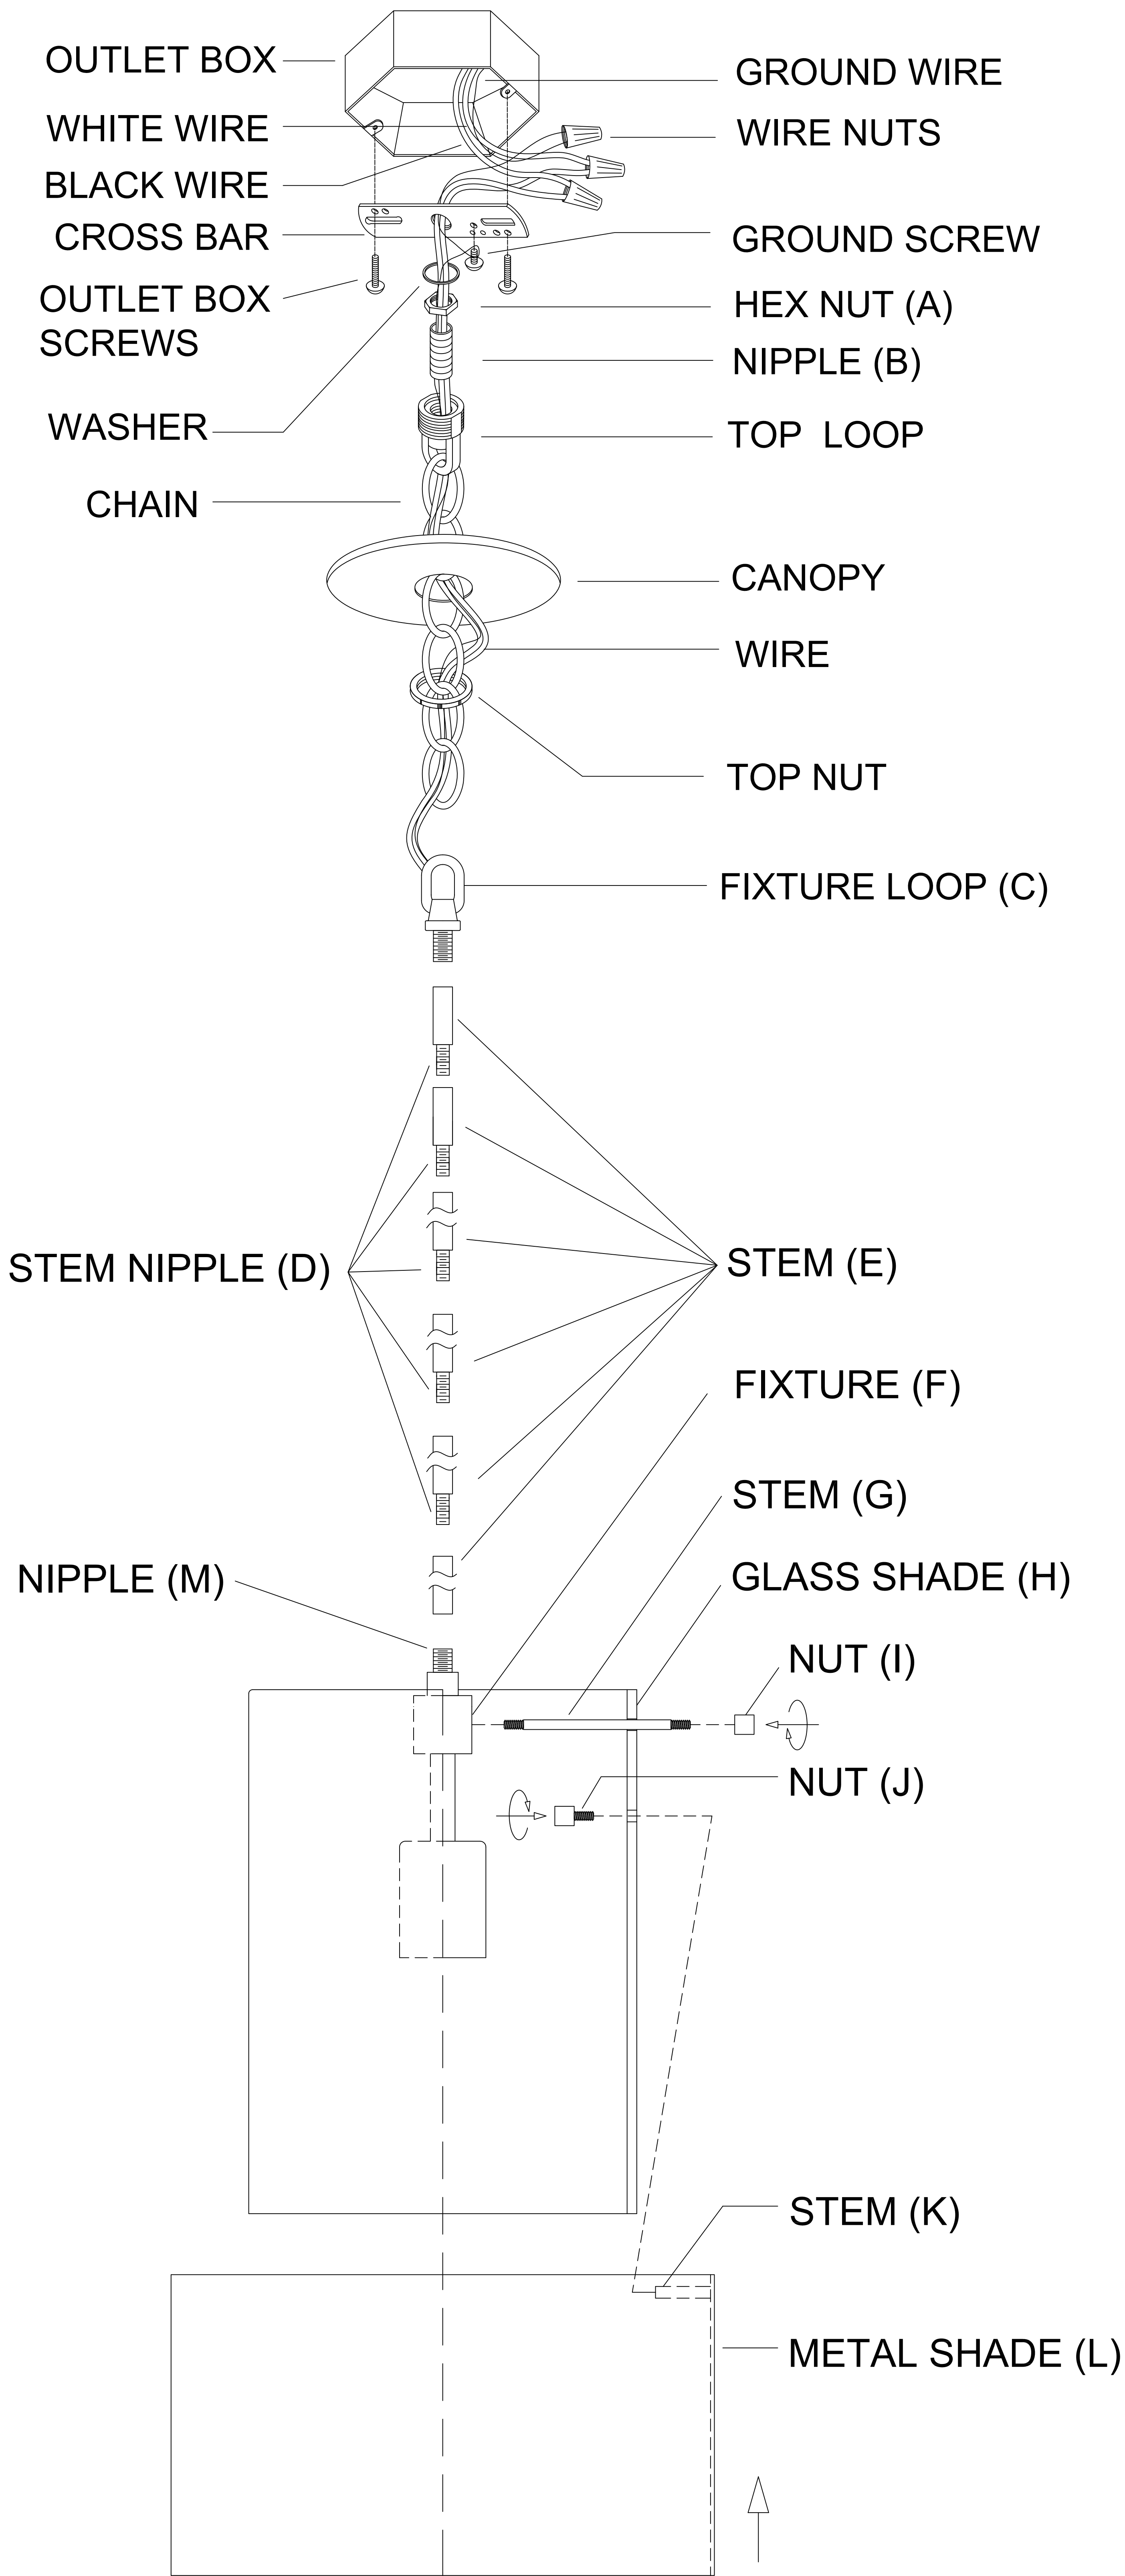

# 8012-XX

# 8013-XX