

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:


TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread two mounting screws properly into the two relevant relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using two outlet box screws upwards.
3. Adjust the fixture wire to the length you require, and secure it with wire strainer inside the canopy.
4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire,
negative wire with negative wire, ground
wire with ground wire.

5. Tuck the wire connections neatly into the outlet box.
6. Attach the canopy to the ceiling and let the two mounting screws protrude through the two pre-drilled holes on the canopy and secure it with ball nuts.
7. Place the glass shade onto the socket and secure it with socket ring.
8. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
9. Turn on the power at fuse or circuit box.

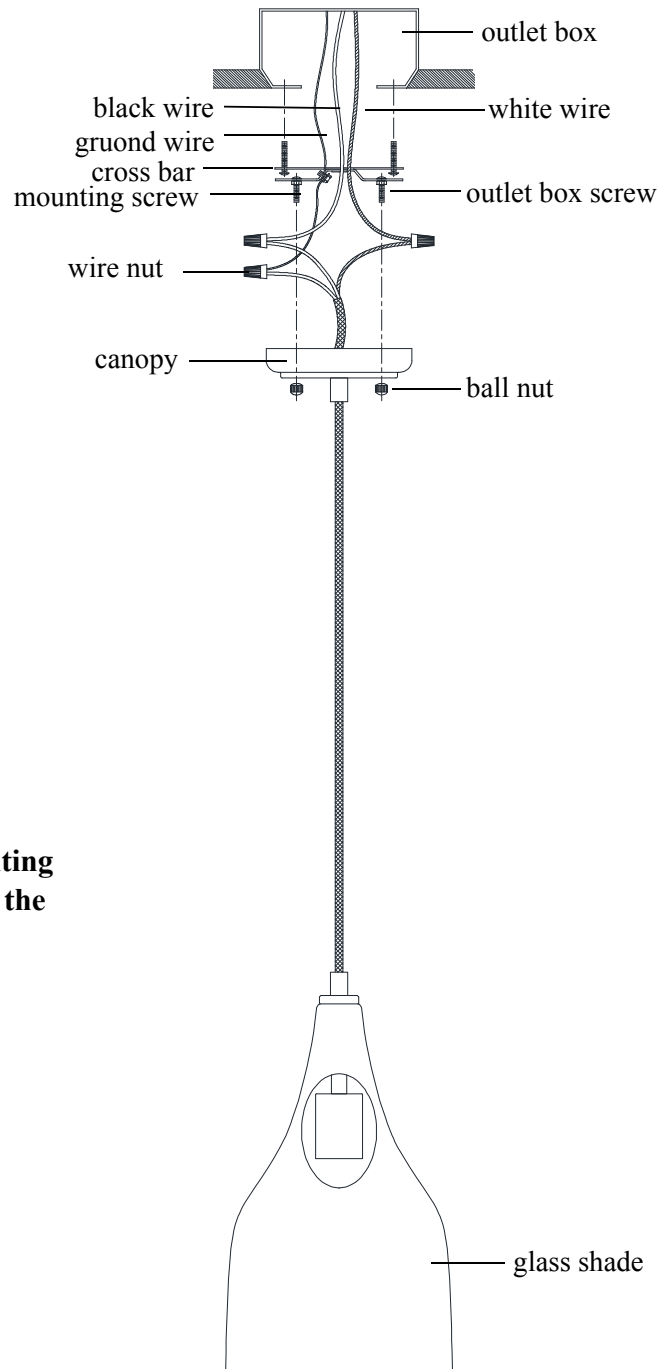

8041-65	8043-80	8142-65
8041-80	8044-65	8142-80
8042-65	8044-80	8143-65
8042-80	8141-65	8143-69
8043-65	8141-69	