


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Insert downward 2 screws to the mounting strap.
 2. Attach the mounting strap to the outlet box by using 2 mounting screws.
 3. Thread the fixture wire through the set nipple and the canopy, and then secure the canopy with the set nipple.
 4. Make wire connections with wire nuts:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.
- Observing the color code: black with black, white with white, green with green.
5. Fix the canopy to ceiling, blocking it with screw.
 6. Fix A on B.
 7. Fix H on C with screw.
 8. Use D. E. F. through H, then fix D. E. F with the screw and washer .
 9. Use G through ,and use I lock on H, make G fixation tight.

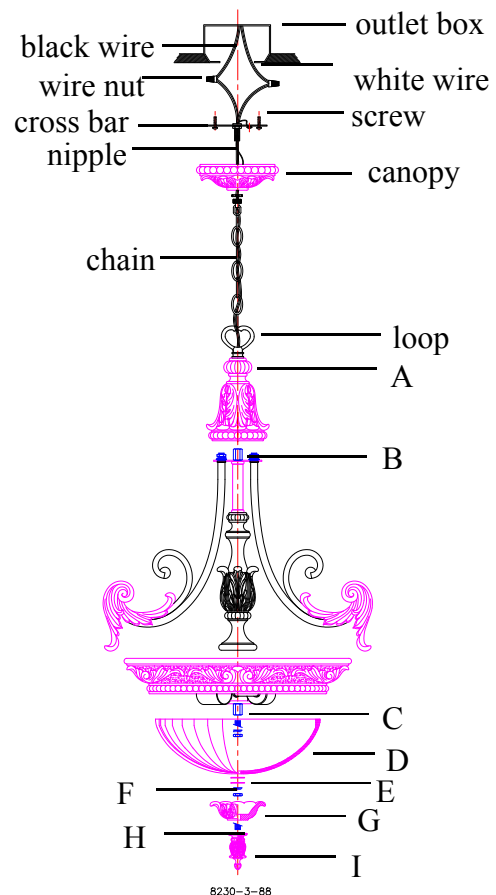

8230-3-88